


BHN220E and BHN221E Handbrake adjusting



Settings:

Once the caliper is installed and bleeding completed. With the handbrake cable loose, and hand brake cable lever in rest position on the pin.

Remove the seal screw.

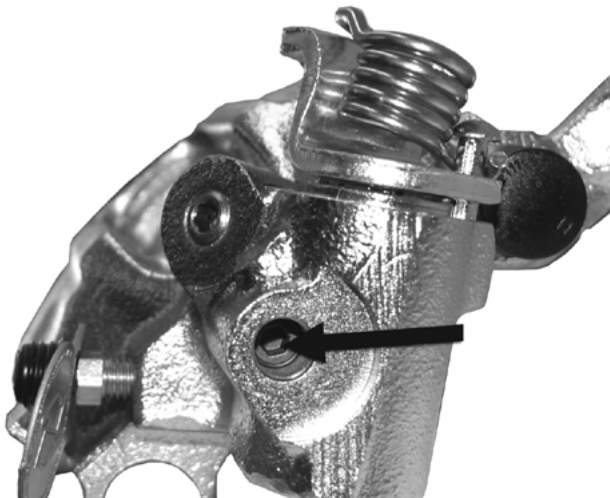

Wind the 4 mm hexagon screw clockwise until the brake pads touch the brake disc.



Wind back anti-clockwise until the disc can be turned freely.

Refit and tighten the sealing screw.
Adjust the hand brake cable.

Check the setting on a brake test bench.
Finally test drive the vehicle to check the full Braking system.

