





**16:52-50**

Utgåva/Issue/Ausgabe/Uitgave/Edición/Édition/Edizione/Painos 1

- Nod A, X**
- Node A, X**
- Knoten A, X**
- Vertakkingspunt A, X**
- Nodo A, X**
- Nod A, X**
- Nod A, X**
- Noodi A, X**

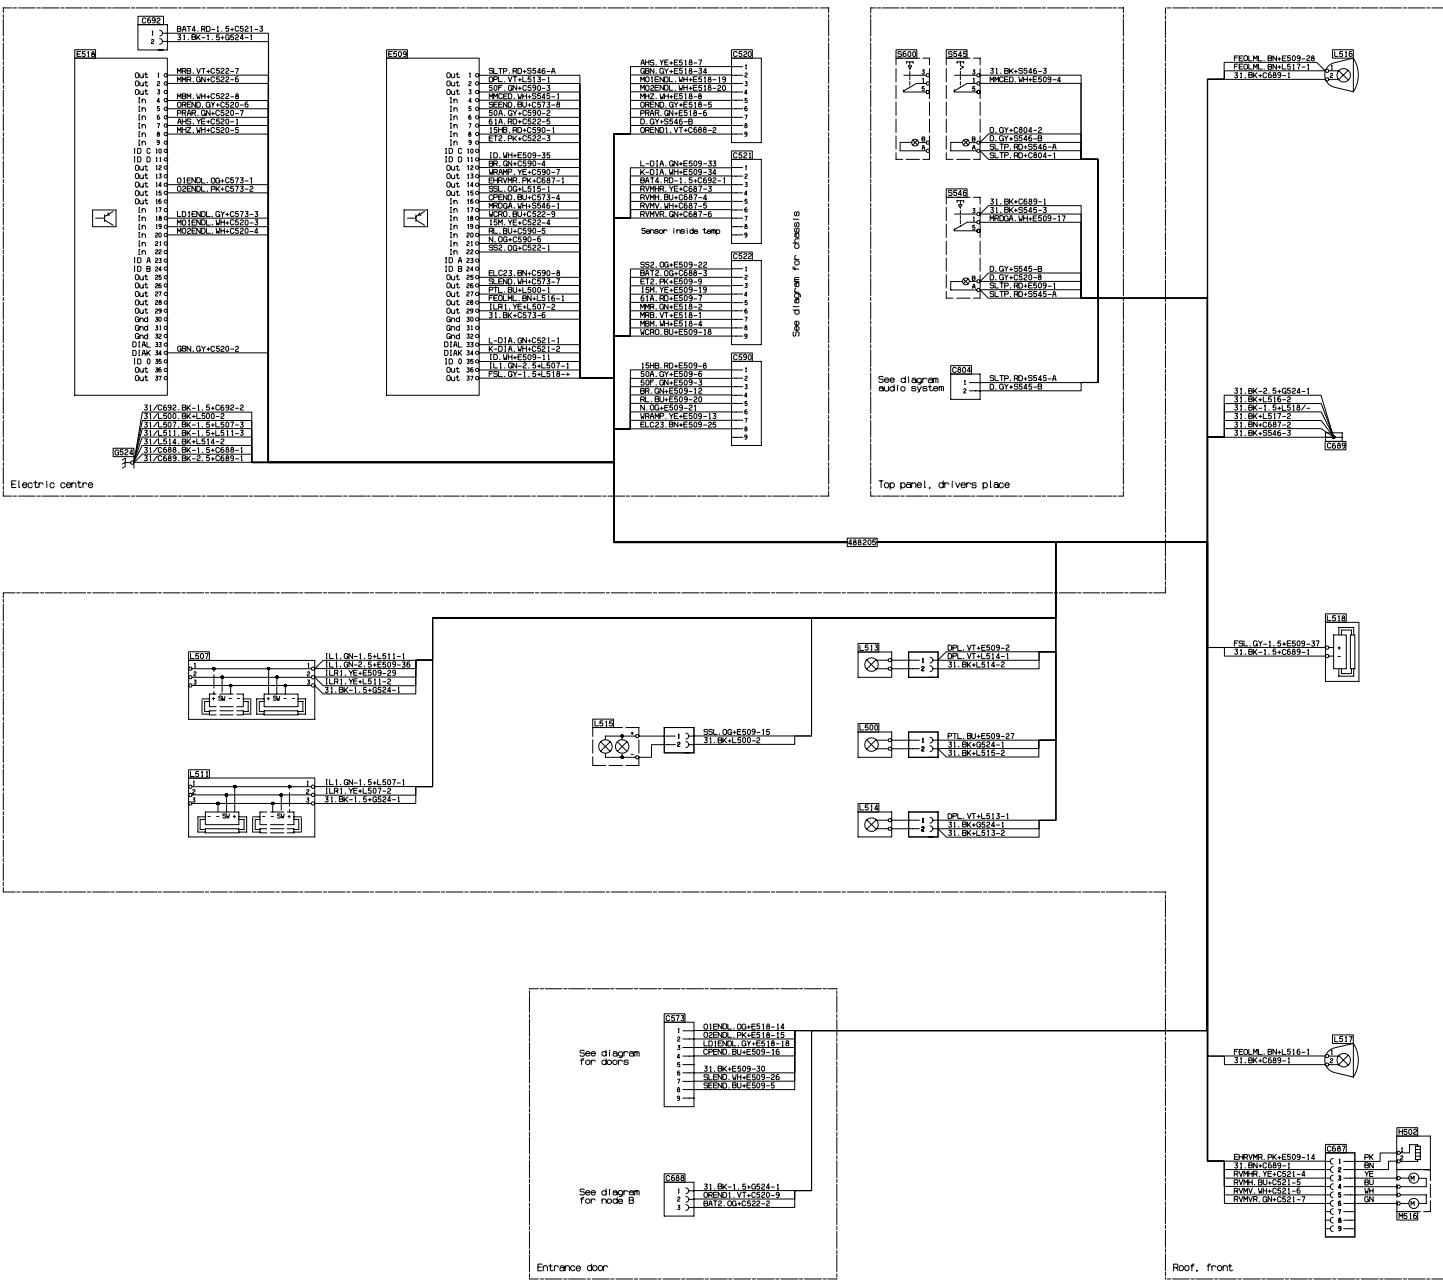

Des.	Pos.	Description
C520	F5	
C521	F5	
C522	E5	
C523	B6	Connector
C590	E5	
C687	A3	
C688	A6	3-pole
C689	D3	Joining sleeve
C692	F8	2-pole
C804	E4	Connector
E509	F7	Node
E516	F8	Node
G524	D8	Ground
H502	A3	El. heated near
L500	C5	Ray table lamp
L507	C7	Interior light
L513	C5	Drivers place lamp
L514	C5	Entrance lamp
L515	C6	Stop sign light
L516	F3	End-outline mirror
L517	B3	front right
L518	D3	Signbox light
M516	A3	Motor unit el. adjustable near mirror
S545	F4	Main sw. exit doors
S546	E4	Switch
S600	F5	Manoeuv. secur. ex. door



Code	Type	Colour code of electric cables
A	100-100-24V-2W	Code colour
B	100-24V-2W	BK Black
C	100-24V-15W	BN Brown
D	100-24V-5W	RD Red
E	100-24V-10W	OG Orange
F	100-24V-5W	TE Yellow
G	24V-1-2W	GN Green
H	100-24V-24V	BU Blue
K	100-24V-75/10W	WH White
L	100-24V-50/50W	PK Pink
M	100-24V-1-2W	WH White
N	100-24V-2W	PK Pink
P	100-24V-10W	PK Pink
R	100-24V-24V	PK Pink

Additional or optional equipment  
Dotted cable: Dotted detail

Power supply and communication for nodes are located on a separate drawing.