



16:52-63

Utgåva/Issue/Ausgabe/Utgave/Edición/Édition/Edizione/Painos 1

Nod B, ledbuss

Node B, articulated bus

Knoten B, Gelenkbus

Knoop B, gelede bus


Nudo B, autobus articulado

Noeud B, autobus articulè


Giunzione B, autobus articolato

Noodi B, nivelbussi

Nó B, ônibus articulado

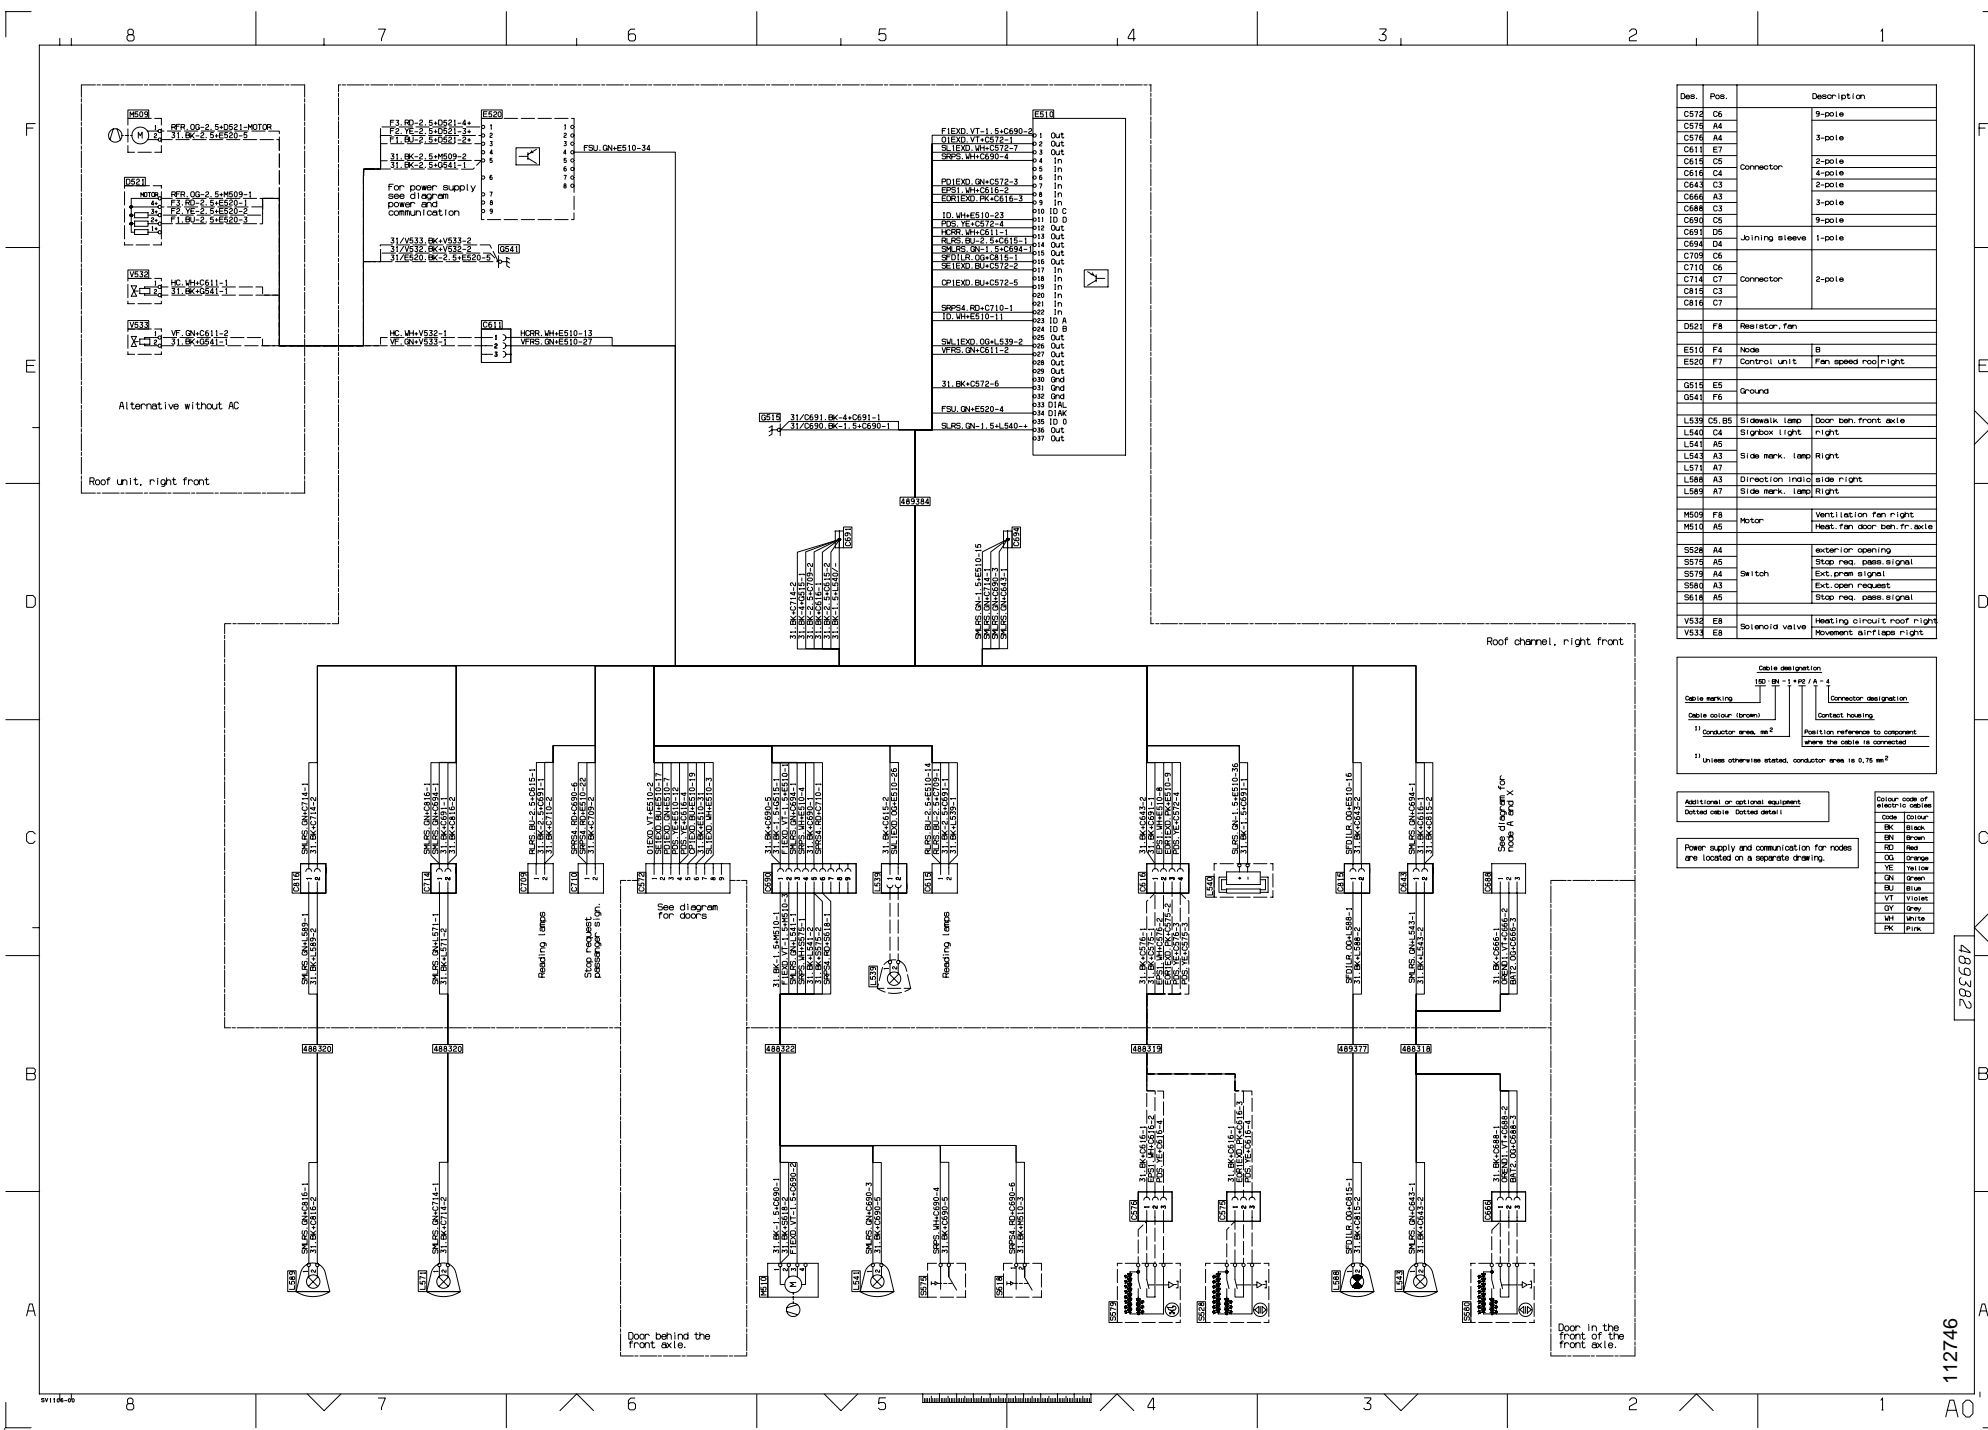

Des.	Pos.	Description
C572	C6	9-pole
C578	A4	
C578	A4	3-pole
C611	E7	
C619	C5	Connector 2-pole
C616	C4	4-pole
C643	C3	3-pole
C666	A3	2-pole
C686	C3	3-pole
C690	C5	9-pole
C691	D5	Joining sleeve 1-pole
C709	C6	
C710	C6	
C714	C7	Connector 2-pole
C815	C3	
C816	C7	
D621	F8	Resistor, fan
E510	F4	Node B
E520	F7	Control unit Fan speed roof right
G519	E5	Ground
G541	F6	
L539	C5, E5	Stairwell lamp Door bah front axle
L540	C4	Signbox light right
L541	A5	
L543	A3	Side mark. lamp Right
L571	A7	
L588	A3	Direction indic. side right
L589	A7	Side mark. lamp Right
M509	F8	Motor Ventilation fan right
M510	A5	Heest. fan door bah. fr. axle
S536	A4	extension opening
S578	A5	Stop req. pass signal
S579	A4	Switch Ext. prom signal
S580	A3	Ext. open request
S618	A5	Stop req. pass signal
V532	E8	Heating circuit roof right
V533	E8	Movement airflaps right



Additional or optional equipment
 Dotted cable Dotted detail

Colour code of electric cables

Code	Colour
BK	Black
BR	Brown
RD	Red
OR	Orange
VE	Yellow
GN	Green
BU	Blue
VT	Violet
GR	Grey
WH	White
PK	Pink

Power supply and communication for nodes are located on a separate drawing.

112746

285689