


16:54-21

Edition 1

Comfort Shift

K/L

**Förbindningschema, Wiring Diagram, Verbindungsplan,
Bedradingsschema, Schéma de câblage, Diagrama de
conexiones, Diagrama de conexões, Schema del collega-
menti, Kytentäkaavio, Schemat połączeń**

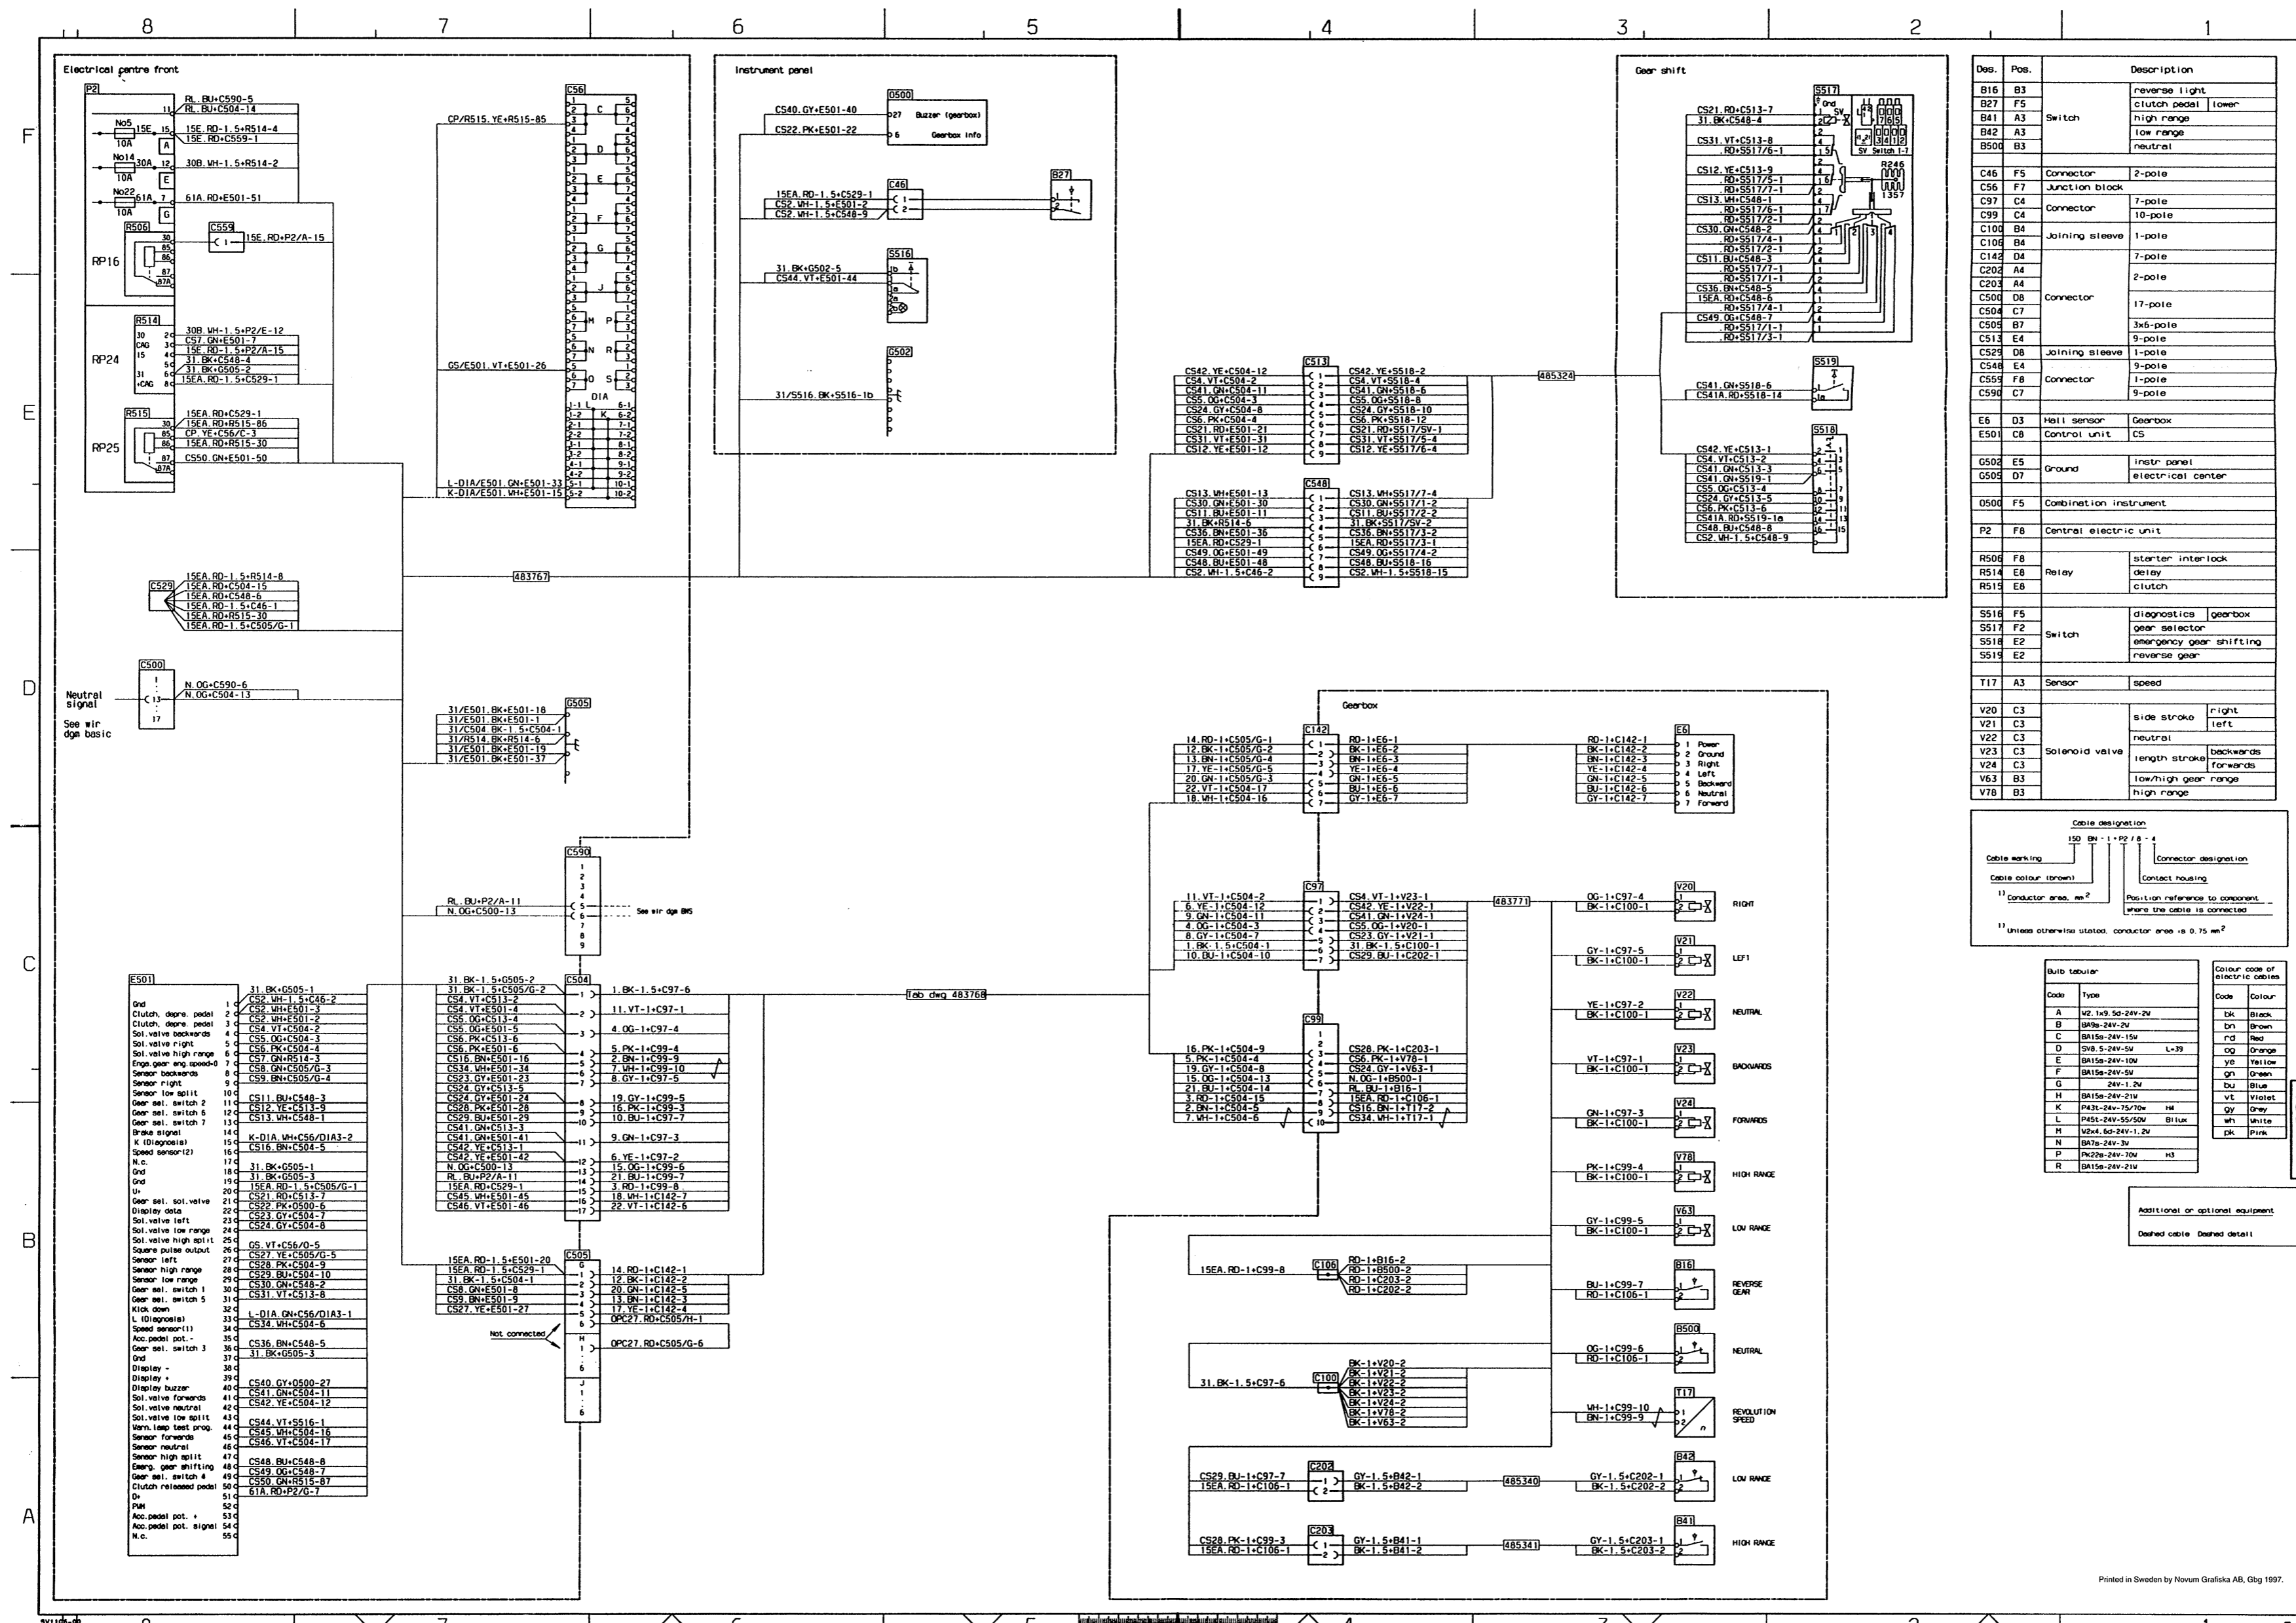

Des.	Pos.	Description
B16	B3	reverse light
B27	F5	clutch pedal lower
B41	A3	Switch high range
B42	A3	low range
B50	B3	neutral
C46	F5	Connector 2-pole
C56	F7	Junction block
C97	C4	Connector 7-pole
C99	C4	Connector 10-pole
C100	B4	Joining sleeve 1-pole
C108	B4	7-pole
C202	A4	Connector 2-pole
C500	D8	Connector 17-pole
C504	C7	3x6-pole
C505	B7	9-pole
C529	D8	Joining sleeve 1-pole
C548	E4	9-pole
C559	F8	Connector 1-pole
C590	C7	9-pole
E6	D3	Hall sensor Gearbox
E501	C8	Control unit CS
G502	E5	Ground instr panel
G505	D7	Ground electrical center
O500	F5	Combination instrument
P2	F8	Central electric unit
R508	F8	Relay starter interlock
R514	E8	Relay delay
R515	E8	clutch
S515	F5	diagnostics gearbox
S517	F2	gear selector
S518	E2	emergency gear shifting
S519	E2	reverse gear
T17	A3	Sensor speed
V20	C3	side stroke right
V21	C3	left
V22	C3	neutral
V23	C3	Solenoid valve backwards
V24	C3	length stroke forwards
V63	B3	low/high gear range
V78	B3	high range

Cable designation
 Cable marking: 150 BK-1-1-P2/F8-4
 Cable colour (brown)
 Cable designation: BK-1-C100-1
 Contact housing: BK-1-C100-1
 Position reference to component where the cable is connected

Code	Type	Colour
A	v2, 1x9, 5x24V-2V	Black
B	BA15e-24V-2V	Brown
C	BA15e-24V-2V	Red
D	5x9, 5x24V-5V L-39	Orange
E	BA15e-24V-10V	Yellow
F	BA15e-24V-5V	Green
G	24V-2V	Blue
H	BA15e-24V-21V	Violet
K	PA31-24V-75/10V	Grey
L	PA51-24V-55/50V	White
M	24V, 50-24V-1, 2V	Black
N	BA7a-24V-3V	White
P	PA22e-24V-10V	Black
R	BA15e-24V-21V	Pink

Additional or optional equipment
 Dashed cable Dashed detail