


Des.	Pos.	Description
C520	F5	Connector
C521	F5	
C522	E5	
C523	D5	
C573	B6	
C590	E5	9-pole
C687	A3	4-pole
C688	A6	1-pole
C689	D3	Joining sleeve
C804	E4	Connector
E509	F7	Node
E518	F8	X
G524	D8	Ground
H502	A3	El. heated rear right
L500	C5	Pay table lamp
L513	C5	Drivers place lamp
L514	C5	Entrance lamp
L516	F3	End- outline ma front left
L517	B3	front right
L518	D3	Signbox light front
M516	A3	Motor unit el adjustable rear mirror
S545	F4	Main sw. exit doors
S546	E4	Reset gate alarm
S500	F5	Manoev. secur. ex. door

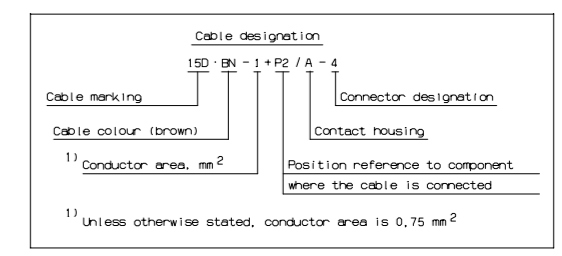


Code	Type	Colour code of electric cables	Classification acc to 57394
A	V2. 1x9. 5d-24V-2W	BK Black	◀(B)▶
B	BA9s-24V-2W	BN Brown	◀(N)▶
C	BA15s-24V-15W	RD Red	◀(R)▶
D	SV8. 5-24V-5W L=39	OG Orange	◀(O)▶
E	BA15s-24V-10W	YE Yellow	◀(Y)▶
F	BA15s-24V-5W	GN Green	◀(G)▶
G	24V-1.2W	BU Blue	◀(L)▶
H	BA15s-24V-21W	VT Violet	◀(V)▶
K	PA31-24V-75/70W H4	GY Grey	◀(G)▶
L	PA51-24V-55/50W Bi Lux	WH White	◀(W)▶
M	V2x4. 6d-24V-1.2W	PK Pink	◀(P)▶
N	BA7s-24V-3W		
P	PK22s-24V-70W H3		
R	BA15s-24V-21W		

Additional or optional equipment  
Dotted cable: Dotted detail

Power supply and communication for nodes are located on a separate drawing.

114939

492825



**16:62-50**

Utgåva/Issue/Ausgabe/Utgave/Edición/Edition/Edizione/Painos 1

**Nod A, X**

**Node A, X**

**Knoten A, X**

**Vertakkingspunt A, X**

**Nodo A, X**

**Nod A, X**

**Nod A, X**

**Noodi A, X**

**BNS 4/BNS 5**