


Des.	Pos.	Description
C518	C2	1-pole
C603	A7	2-pole
C604	F8	9-pole
C613	D7, C7	12-pole
C685	B2	9-pole
C711	B2	3-pole
C734	A2	9-pole
C783	D7, C7	9-pole
C857	A8	2-pole
C922	A4	2-pole
D516	C2	Zener diode
E511	C8	Node
E531	A5	Manoeuvre unit el.roof hatch
G527	B2	Ground
H500	A8	Heating element drivers seat
H501	F7	El.heated rear left side
L600	A4	Lamp switch board
M516	F7	Motor unit el adjustable rear mirror
S2	D2	hazard warning light
S548	C2	Exit doors fan
S554	C5	exit doors
S555	B5	El. heat.rear vu mirror
S556	C4, E5	Forced clos. exit doors
S557	F2, C4	Aut. open. exit doors
S558	B6	Diseng. stop request
S559	B6	Diseng. exit doors
S560	B5	El.heated drivers seat
S561	C5	exit doors
S563	C4	Manoeuvre entrance doors
S587	F3	Manoeuvre entr. door
S588	E5	Manoeuvre bus stop br.
S591	F3	Manoeuvre 1st ex. door
S592	E3	Manoeuvre 2nd ex. door
S593	D2	Manoeuvre doors
S595	A6	el adj. rear mirror
S601	E6, D6	Diseng.2nd entr. door
S613	E3	Manoeuvre/Dis. 3rd ex. door
S625	C6	exit doors
S640	E2	Manoeuvre all doors
S641	E5	reset emergency open(n
S642	C5	Manoeuvre bus stop ser
S643	B4	switch board lamp

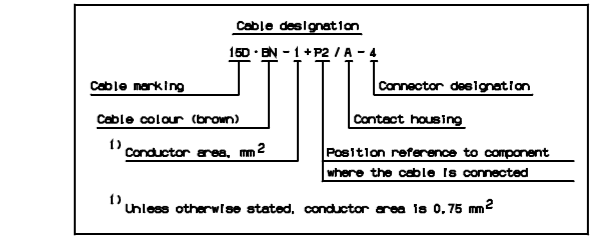


Bulb tabular		Colour code of electric cables		
Code	Type	Code	Colour	
A	M2, 1x9, 5d-24V-2W	BK	Black	
B	BA6a-24V-2W	BN	Brown	
C	BA16a-24V-15W	RD	Red	
D	BA6-24V-2W	L-39	OG	Orange
E	BA16a-24V-15W	OG	Orange	
F	BA16a-24V-5W	GN	Green	
G	24V-1,2W	GN	Green	
H	BA16a-24V-21W	H4		
K	PA3b-24V-75/70W	BL	Blue	
L	PA5-24V-55/50W	BL	Blue	
M	M24, 5d-24V-1,2W	VT	Violet	
N	BA7a-24V-3W	GY	Grey	
P	PA22a-24V-70W	H3		
R	BA16a-24V-21W	WH	White	
		PK	Pink	

Additional or optional equipment
Dotted cable Dotted detail!

Power supply and communication for nodes are located on a separate drawing.

Classification acc to 80344
(C) ; -
(M) ; -
(D) ; -
(L) ; !

42829



16:62-52

Edition 2

Nod C

Node C

Knotenpunkt C

Node C

Nodo C

Noeud C

Nodo C

Solmu C

Węzeł komunikacyjny C

Nó C

BNS 4.1/BNS 5.1