


Des.	Pos.	Description
C785	E7	Connector 3-pole
C786	D5	Joining sleeve 1-pole
C788	C5	12-pole
C789	C5	3-pole
C790	C6	2-pole
C792	C6	2-pole
C793	C3	9-pole
C794	A3	3-pole
C795	A3	3-pole
C806	C6	2-pole
C868	C7	2-pole
C920	C6	2-pole
D524	F8	Resistor, fan
E525	F4	Node 1
E533	F7	Control unit Fan speed roof right, rear
G559	F6	Ground
G560	E5	
L579	C4, B4	Sidewalk lamp Door beh. hinge
L580	A3	Direction indic side right
L582	A5	Side mark. lamp Right
L583	C4	Signbox light Right
L584	A6	Side mark. lamp Right
M519	F8	Motor Vent. fan right rear
M520	A5	Heat. fan door beh. hinge
S608	A3	Ext. prem signal
S609	A3	exterior opening
S610	A4	Prem signal Interior
S611	A4	Stop sign light
S634	A7	Switch Stop req. pass. signal
V544	E8	Solenoid valve Heat. circ. r rear
V545	E8	Solenoid valve Move. air flap rear

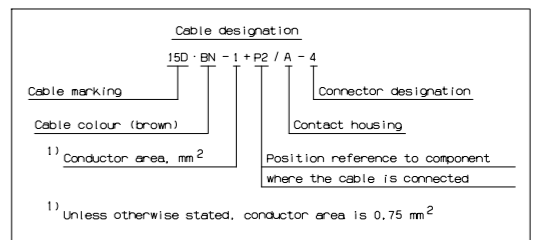

Additional or optional equipment
 Dotted cable Dotted detail

Power supply and communication for nodes are located on a separate drawing.


Classification acc. to STO 3944

(M)	Motor
(S)	Switch
(L)	Lamp
(D)	Diode
(L)	Relay

Colour code of electric cables

Code	Colour
BK	Black
RD	Red
BN	Brown
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink

114973



16:62-57

Utgåva/Issue/Ausgabe/Utgate/Edición/Édition/Edizione/Painos 1

Nod I

Node I

Knoten I

Vertakkingspunt I

Nodo I

Nod I

Nod I

Noodi I

BNS 4/BNS 5