

16:62-63

Edition 1

Nod A och batterislavenhet

Node A and battery slave unit

Knotenpunkt A und Zusatzbatterie

Node A en hulpaccu

Noeud A et unité asservie de batterie

Nodo A y batería auxiliar

Nó A e unidade escrava de bateria


Nodo A e batteria ausiliaria

Solmu A ja lisäakku


Węłowa jednostka sterująca A i jednostka akumulatora podporz

BNS 6/BNS 7

Förbindningschema, Wiring diagram, Verbindungsplan, Elektrisch schema, Schéma de câblage, Diagrama eléctrico, Esquema de conexões, Schema elettrico, Kytkäntäkaavio, Schemat połączeń

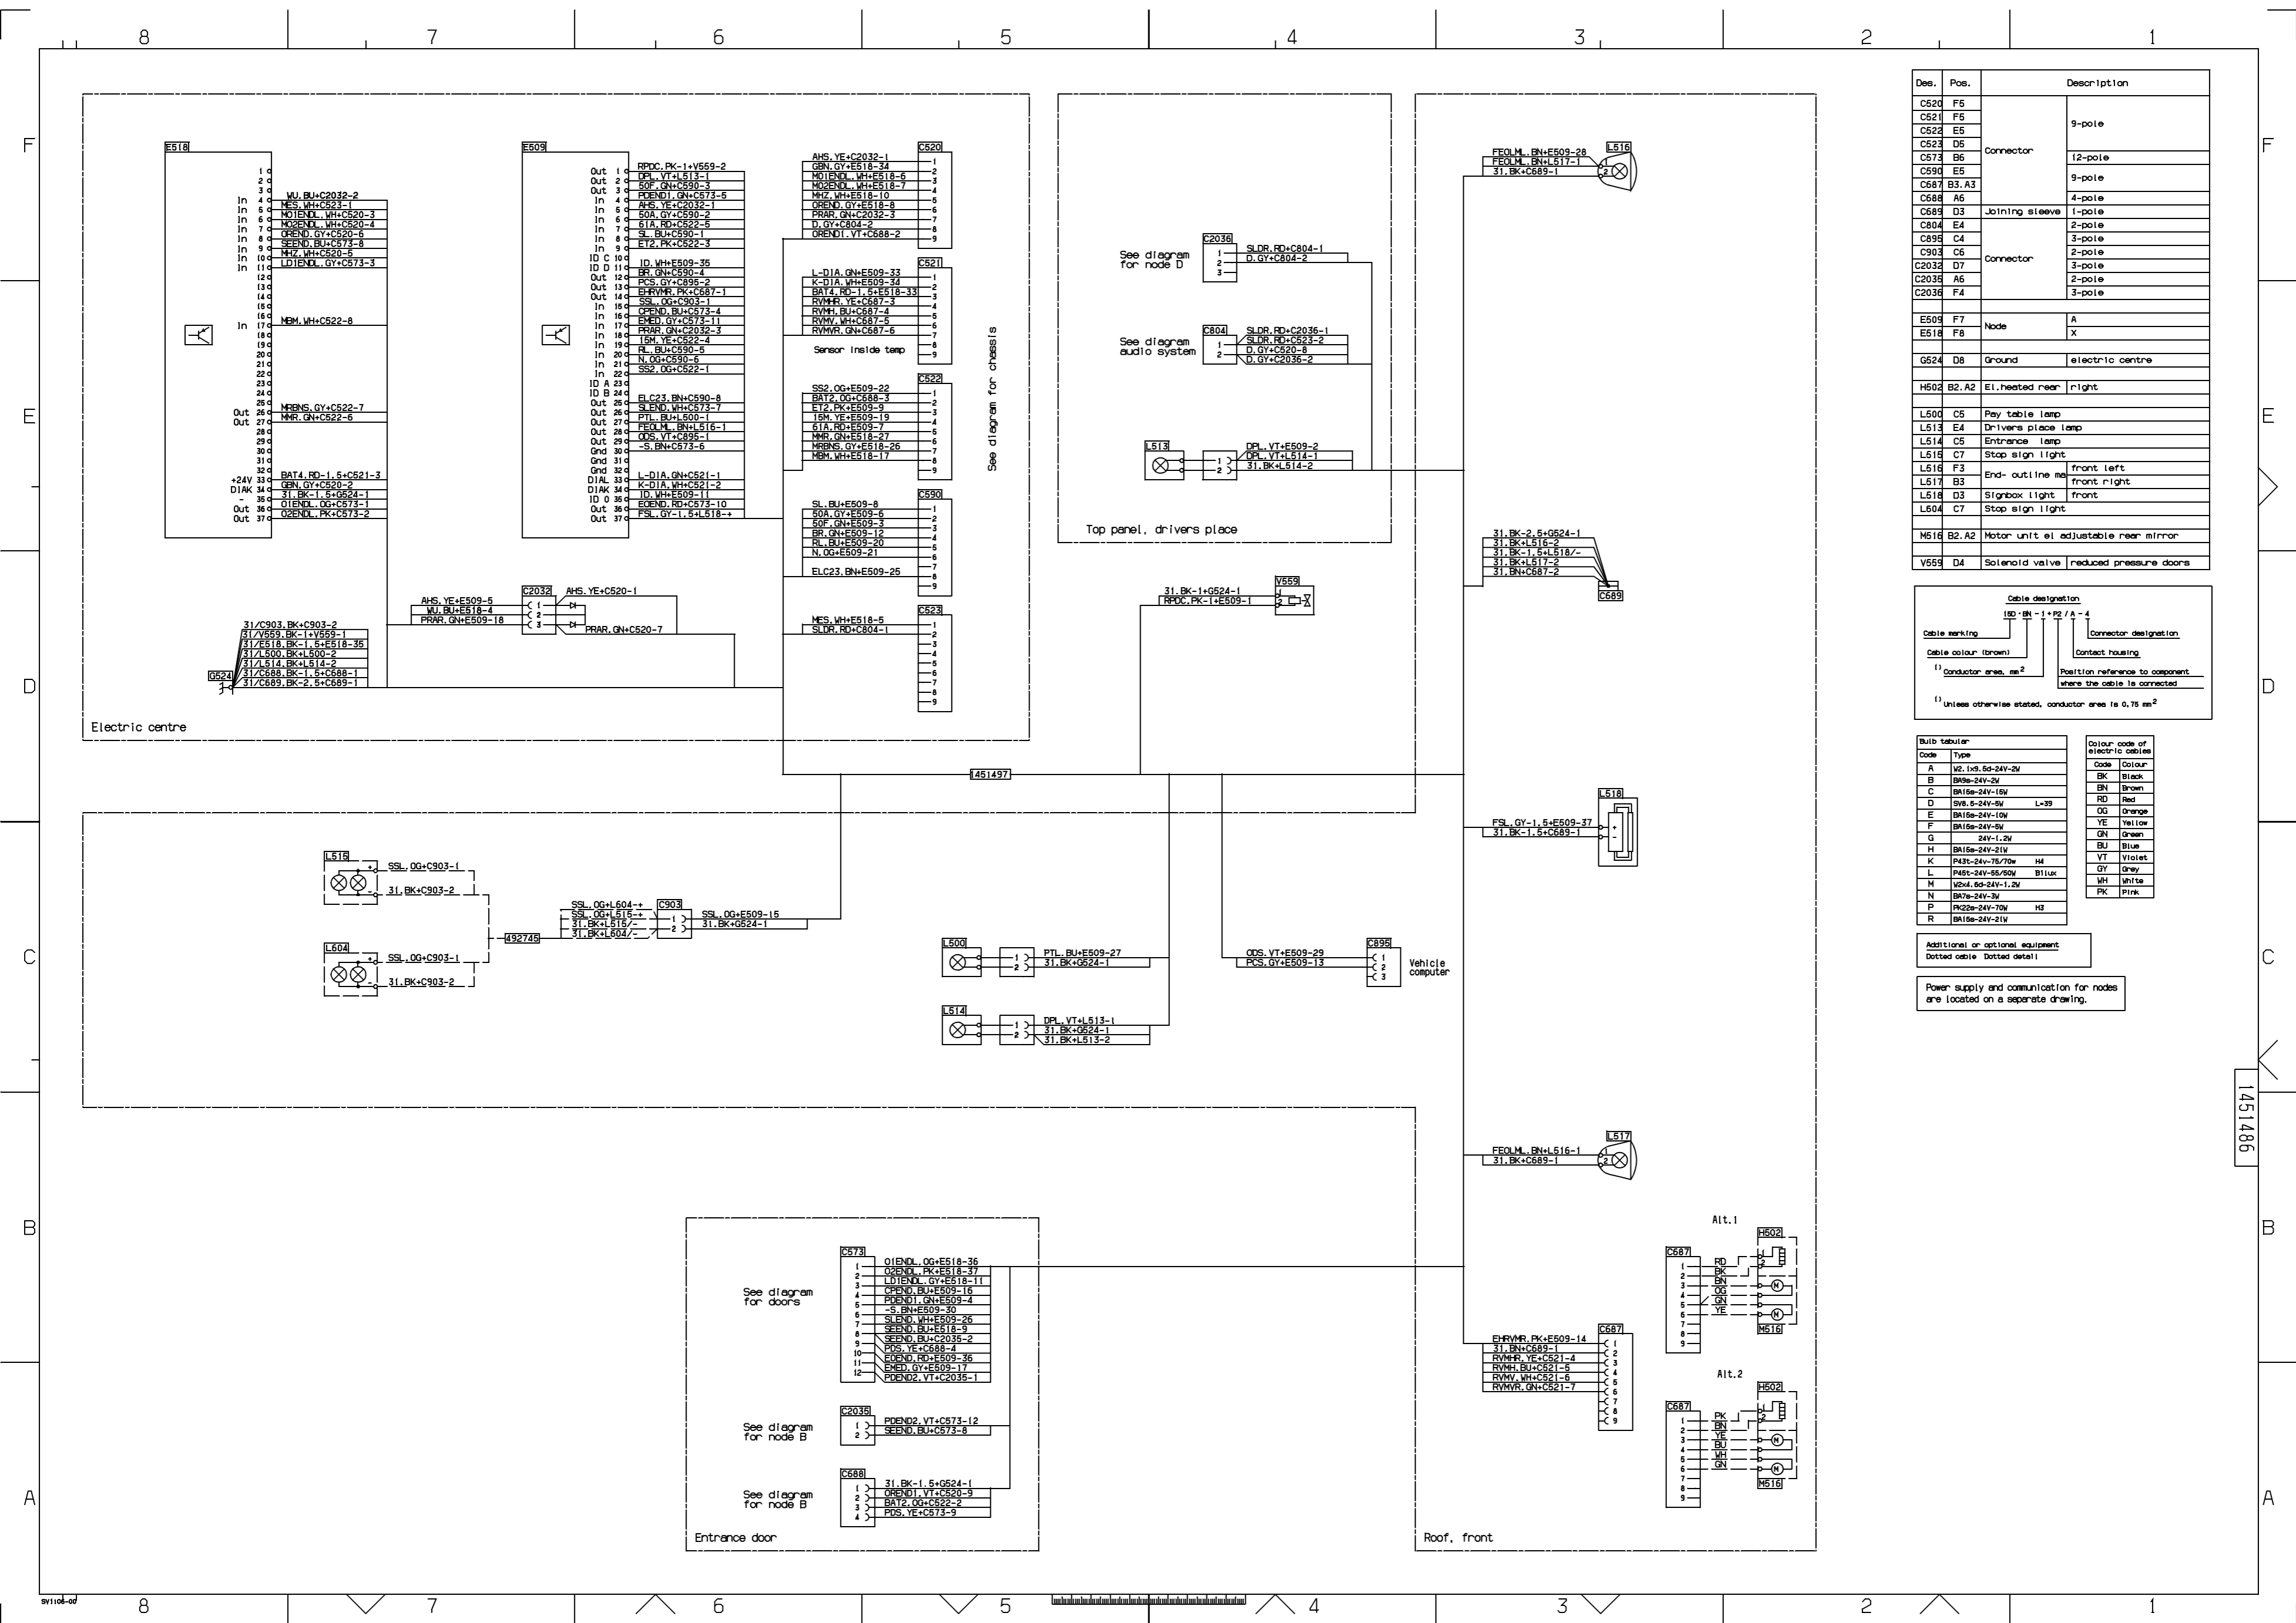

Des.	Pos.	Description
C520	F5	
C521	F6	
C522	E5	9-pole
C523	D5	Connector
C573	B6	12-pole
C590	E5	9-pole
C687	B3, A3	
C688	A6	4-pole
C689	D3	Joining sleeve
C804	E4	2-pole
C898	C4	3-pole
C903	C6	Connector
C2032	D7	3-pole
C2035	A6	2-pole
C2036	F4	3-pole
E509	F7	Node
E518	F8	X
G524	D8	Ground electric centre
H502	B2, A2	E1 heated rear right
L500	C5	Pay table lamp
L513	E4	Drivers place lamp
L514	C5	Entrance lamp
L515	C7	Stop sign light
L516	F3	front left
L517	B3	End- outline lamp front right
L518	D3	Signbox light front
L604	C7	Stop sign light
M516	B2, A2	Motor unit ei adjustable rear mirror
V559	D4	Solenoid valve reduced pressure doors

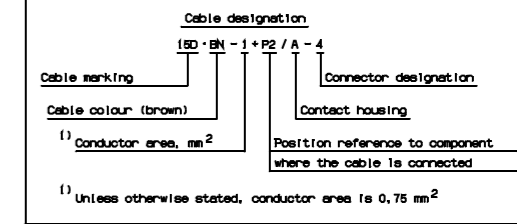

Code	Type	Code	Colour
A	V2, 1x3, 5x-24V-2W	BK	Black
B	BK3e-24V-2W	BN	Brown
C	BK1e-24V-15W	RD	Red
D	SV8, 5-24V-3W L=39	OG	Orange
E	BK1e-24V-10W	YE	Yellow
F	BK1e-24V-4W	GN	Green
G	24V-1.2W	BU	Blue
H	BK1e-24V-21W	VT	Violet
K	PA3e-24V-75/70w HI	GY	Grey
L	PA5e-24V-55/50W B1lux	WH	White
M	12Vd, 60-24V-1.2W	PK	Pink
N	BK7e-24V-3W		
P	PK2e-24V-70W HI		
R	BK1e-24V-21W		

Additional or optional equipment
Dotted cable Dotted detail

Power supply and communication for nodes are located on a separate drawing.

1451406