

SCANIA

00:45-51

Issue 3


en-GB

Dismantling information

Scania Touring

Scania - Higer A80, A30

Work description

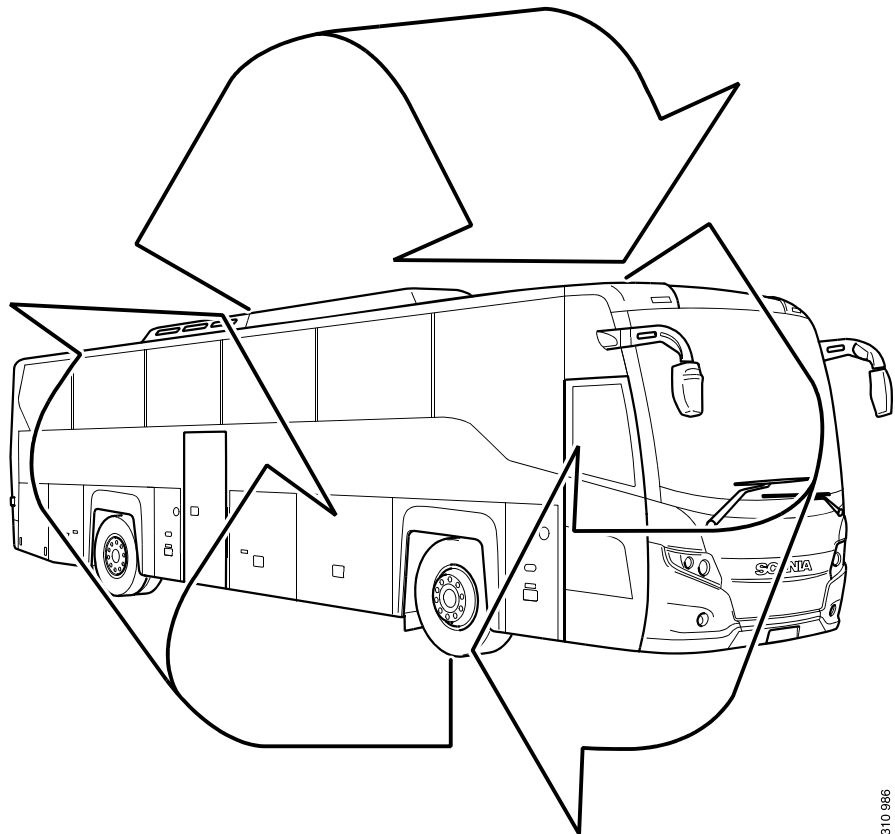

310 986

General	3
Draining and removing	4
Climate system	4
Identification of materials for recycling	7
General	7
Polymeric materials	8
Glass fibre and glass	11
Aluminium	12
Steel and copper	13
Colour codes	15

General

This information is aimed at everyone dealing with reconditioning and scrapping of Scania vehicles. The information applies to workshops as well as companies specialising in dismantling and recycling.

The information is applicable to Scania Touring bus bodywork. However, not all parts are covered in this information booklet. The information is by no means complete.


The first section describes how hazardous waste is to be separated from the vehicle (environmental disposal).

The purpose of the second section is to facilitate identification and sorting of material for recycling.

Draining and removing

Climate system

Tool

Number	Designation	Illustration	Tool board
587 627	Recycling station	 306 928	

Refrigerant R134a



WARNING!

Wear protective gloves and goggles.




WARNING!

Welding, smoking or heating are not allowed if there is refrigerant in the air. Refrigerant generates a very toxic gas when heated.

1. Connect the recycling station hoses to the low-pressure and high-pressure service valves.
2. Drain the refrigerant slowly.

**IMPORTANT!**

The refrigerant must not be released into the atmosphere and must be recycled according to local regulations.

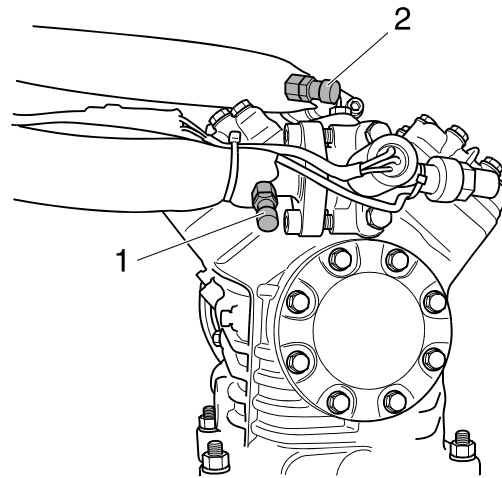


1. *Service valve, low-pressure*
2. *Service valve, high-pressure*

306 958

Coolant

Note:

There might be some coolant left in the system after the coolant has been drained from the system.

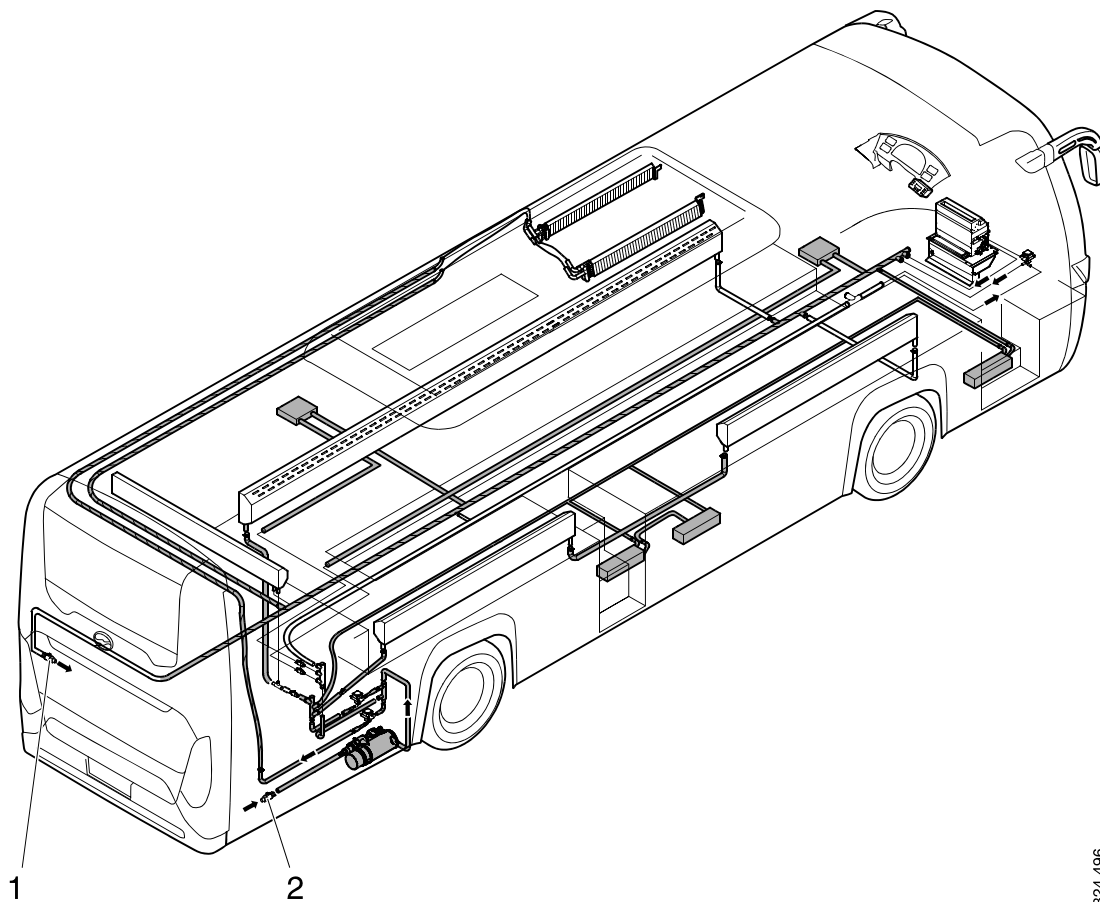

324 496

Pipes and components where some coolant potentially remains


- 1. Return to the engine*
- 2. From the engine*

Identification of materials for recycling

General


The following pages illustrate parts of the vehicle that consist of polymeric materials (primarily plastics), glass fibre, glass, aluminium and steel. The illustrations enable the identification and sorting of these materials for recycling.

Polymeric materials

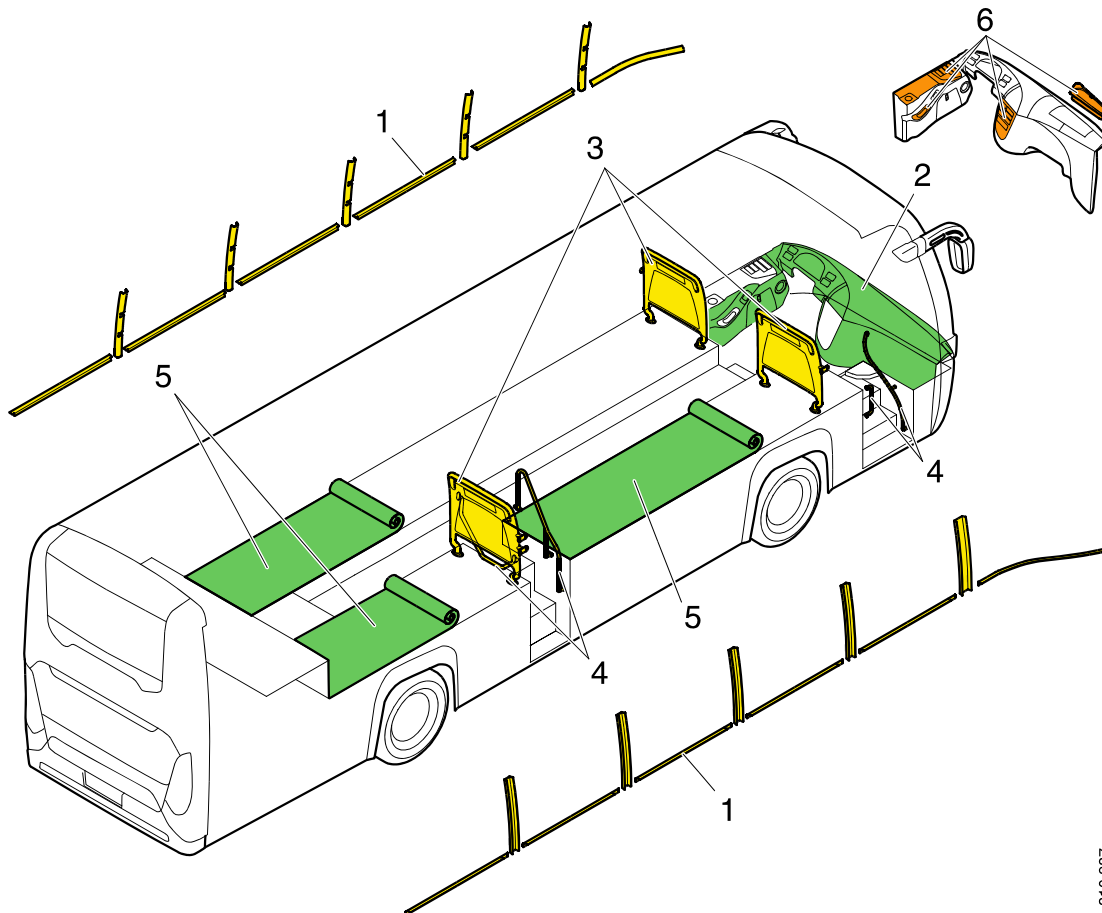


310 987

1. PU (Q345A inside)
2. PVC (Glass fibre inside)
3. PU (wooden board and Q235 inside)
4. PU (HRB400 inside)
5. PVC together with non-woven fabric
6. ABS, frames and panels in the instrument panel

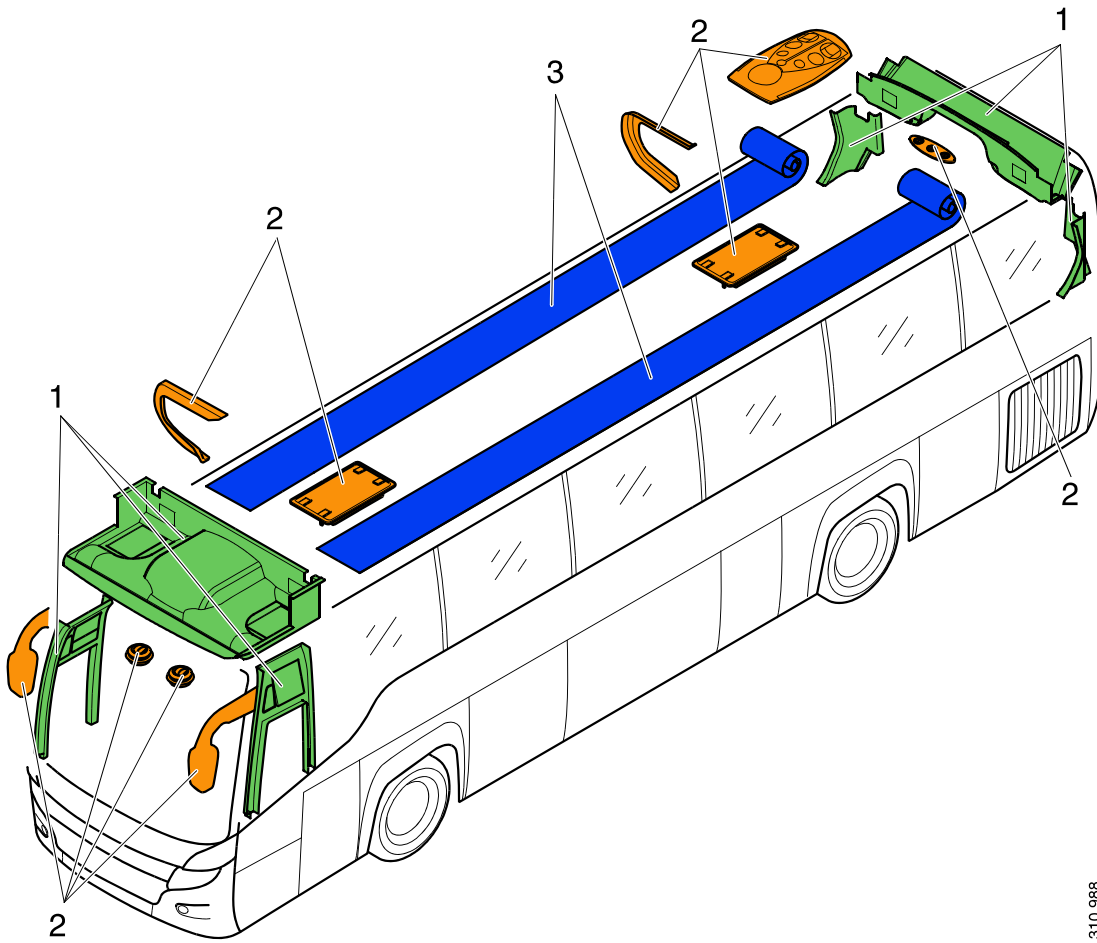

310 988


- 1. PVC
- 2. ABS
- 3. Felt together with PP

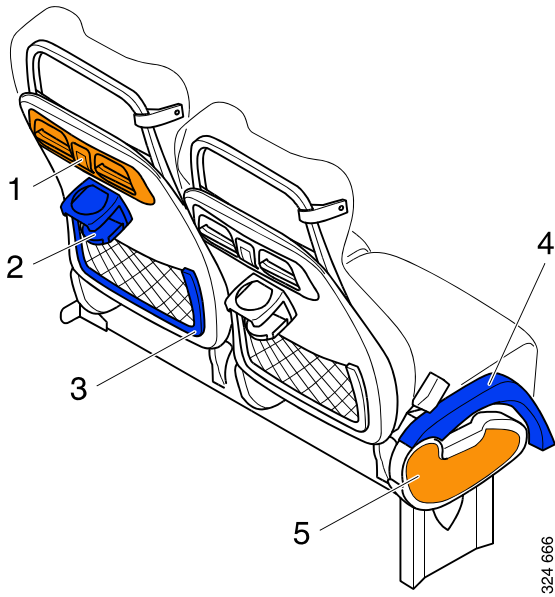


324 666

- 1. ABS
- 2. Others
- 3. Others
- 4. Others
- 5. ABS

Glass fibre and glass

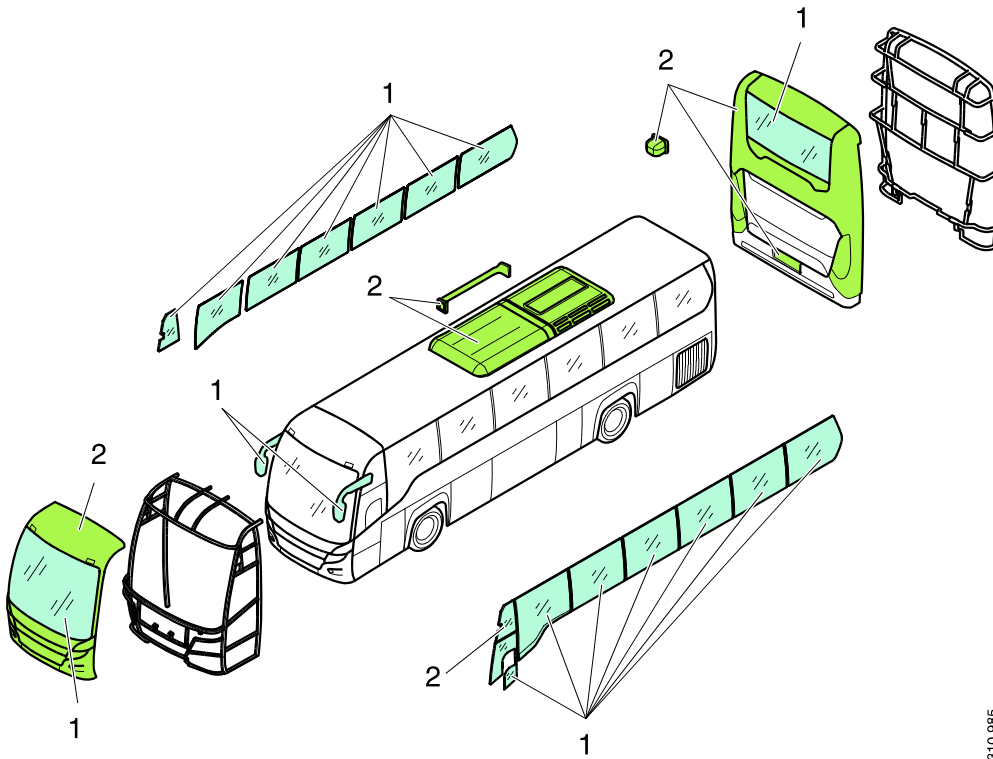

310 985

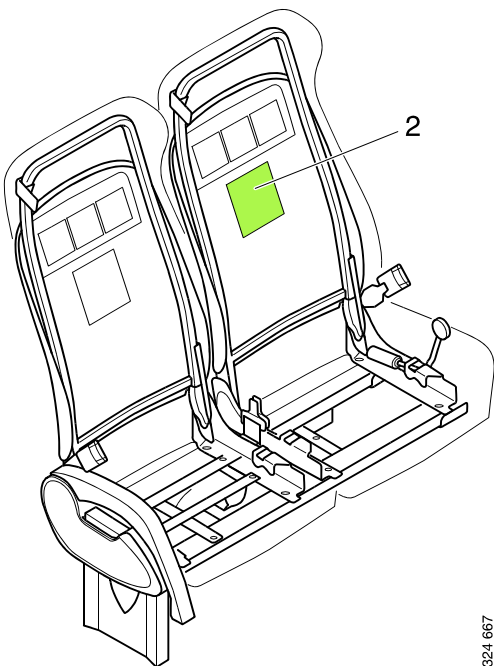


324 667

- 1. Glass
- 2. Glass fibre


Aluminium


Production of raw aluminium consumes a lot of energy. Recycling aluminium consumes relatively little energy. From a life cycle perspective as much of the aluminium as possible should be recycled. Therefore, Scania wants to ensure that most of the aluminium used can be recycled.

The illustration on this page shows the main use of aluminium in the bus. Parts made of aluminium are marked in grey.

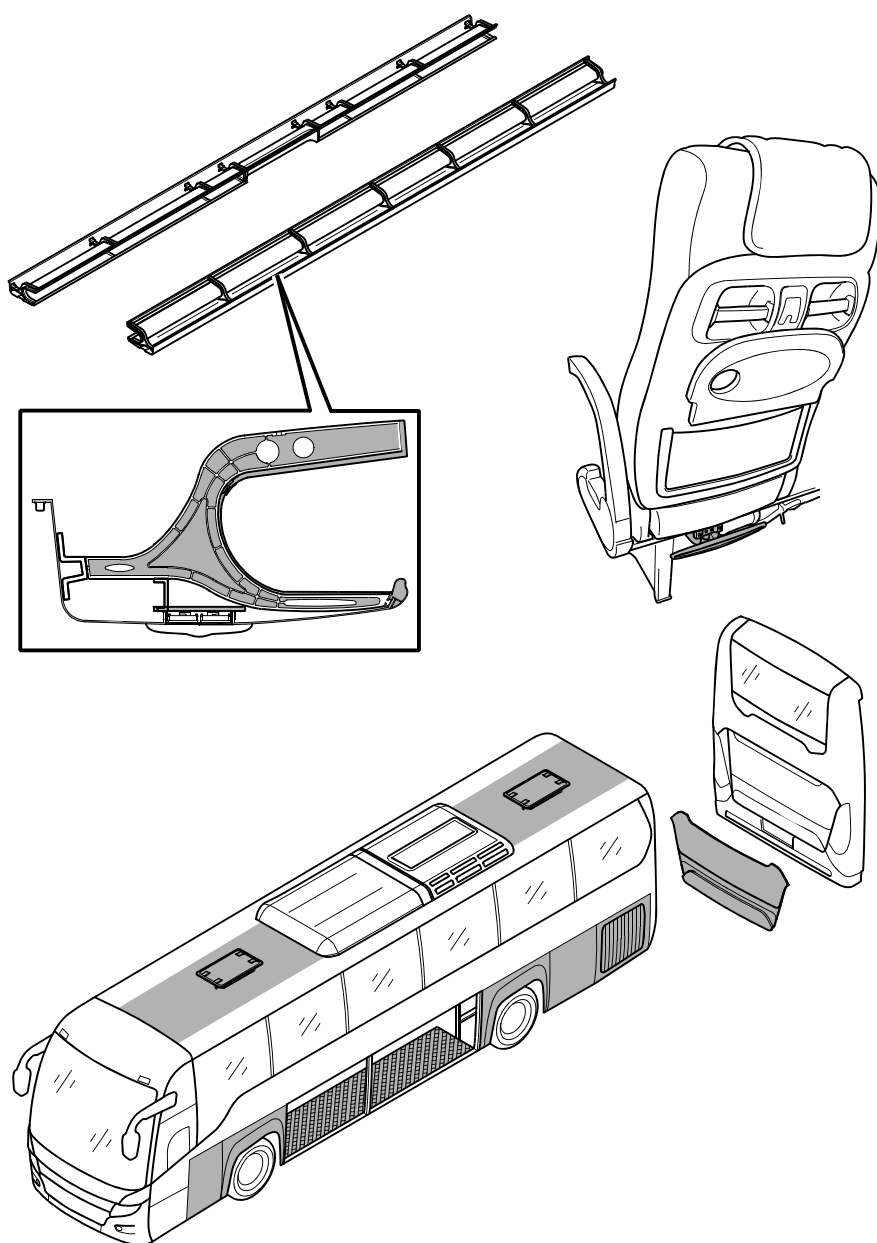

Steel and copper

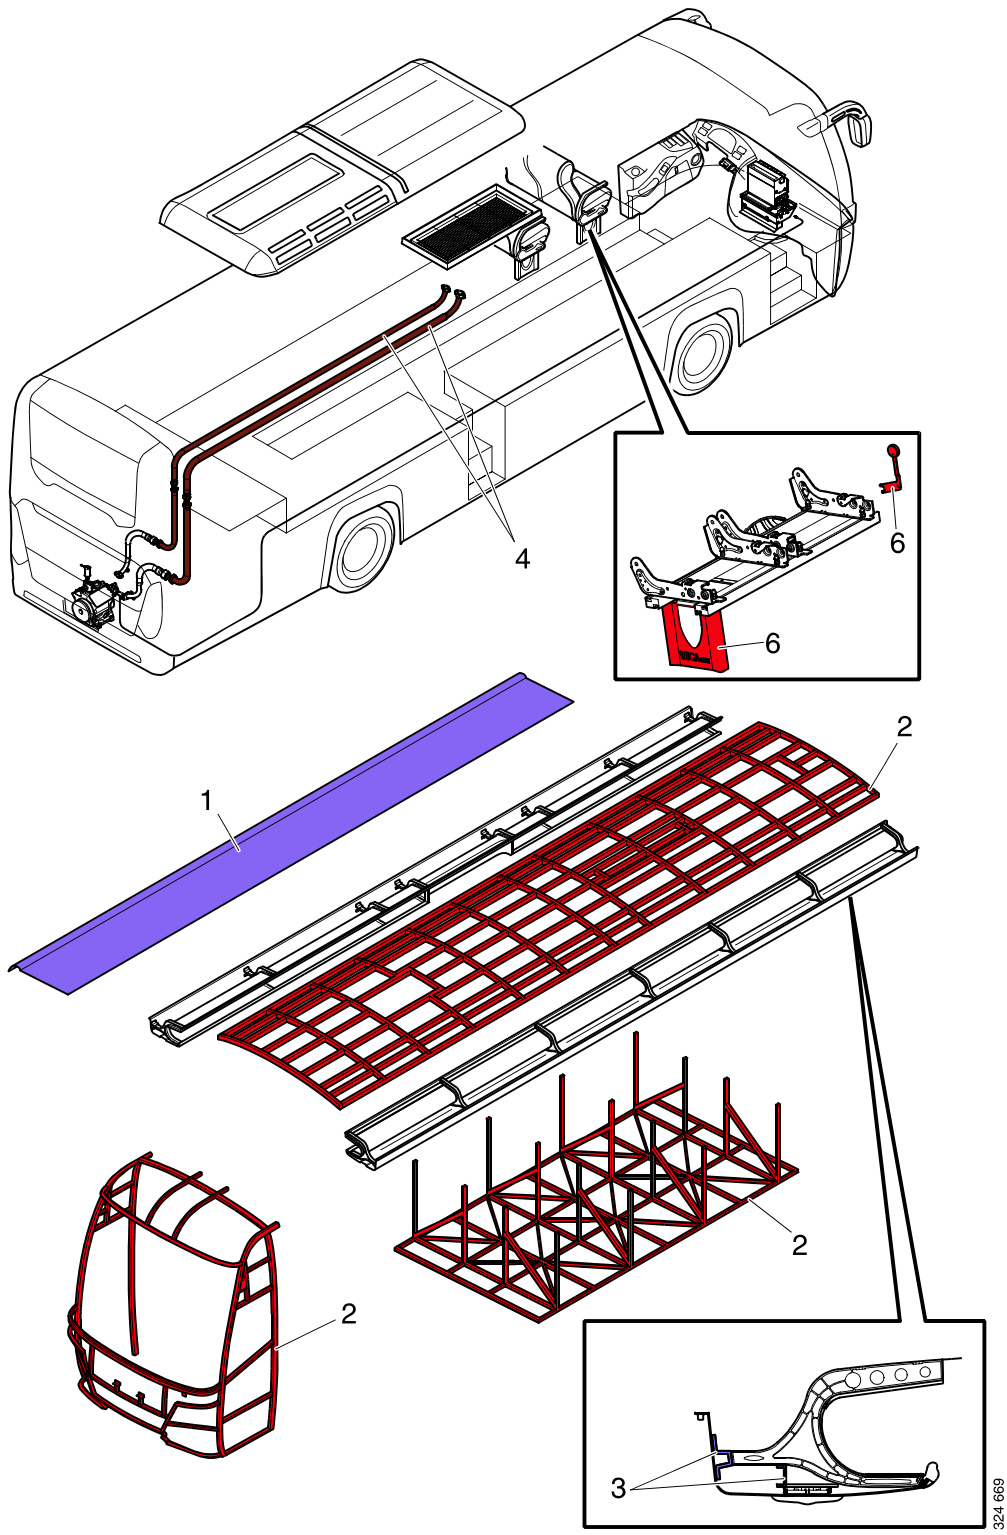

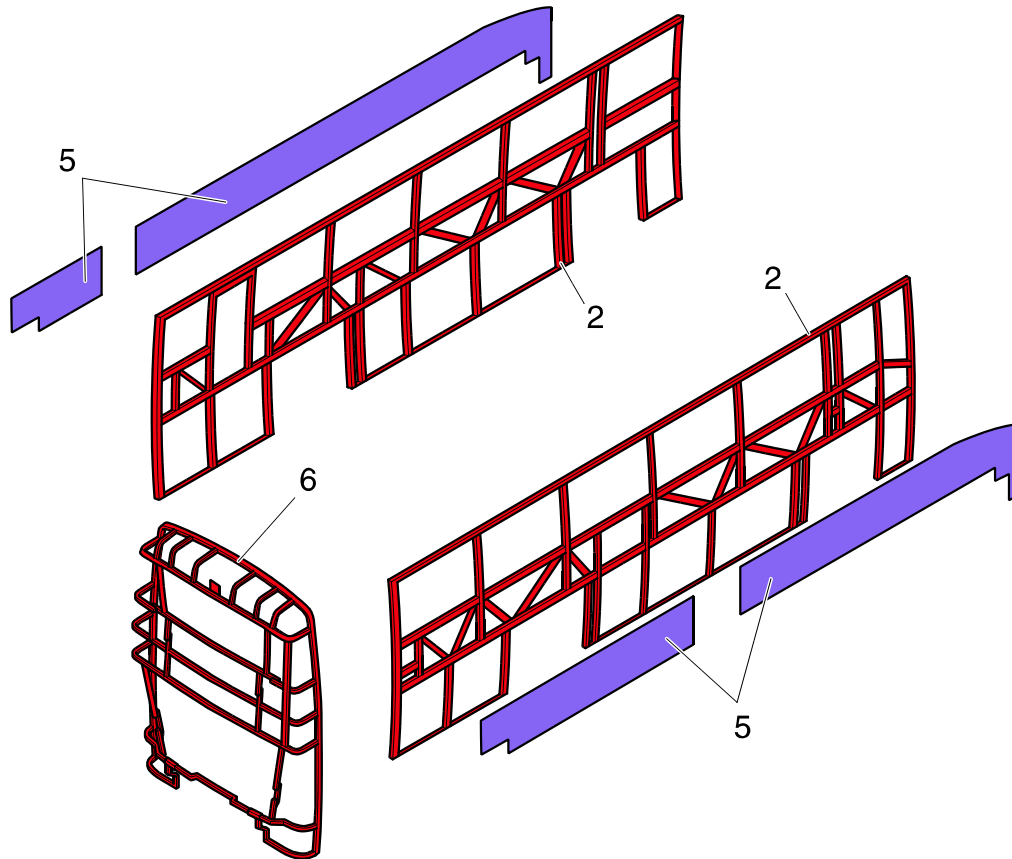


1. Zinc-coated panel DC51D+Z, 1.2 mm
2. Q345
3. Zinc-coated panel DC51D+Z, 1.5 mm
4. Copper, some parts in the AC assembly
5. Zinc-coated panel DC51D+Z, 1.0 mm
6. Q235 or Q345

310 992

Colour codes

	1
	2
	3
	4
	5
	6
	7
	8
	9
	10

324.499

1. *PU*
2. *PVC*
3. *ABS*
4. *Glass*
5. *Glass fibre*
6. *Aluminium*
7. *Steel*
8. *Zinc-coating*
9. *Copper*
10. *Others*