

16:54-22


Edition 1

Comfort Shift


From chassis No:

SBK 1 839 994

SLA 3 524 682

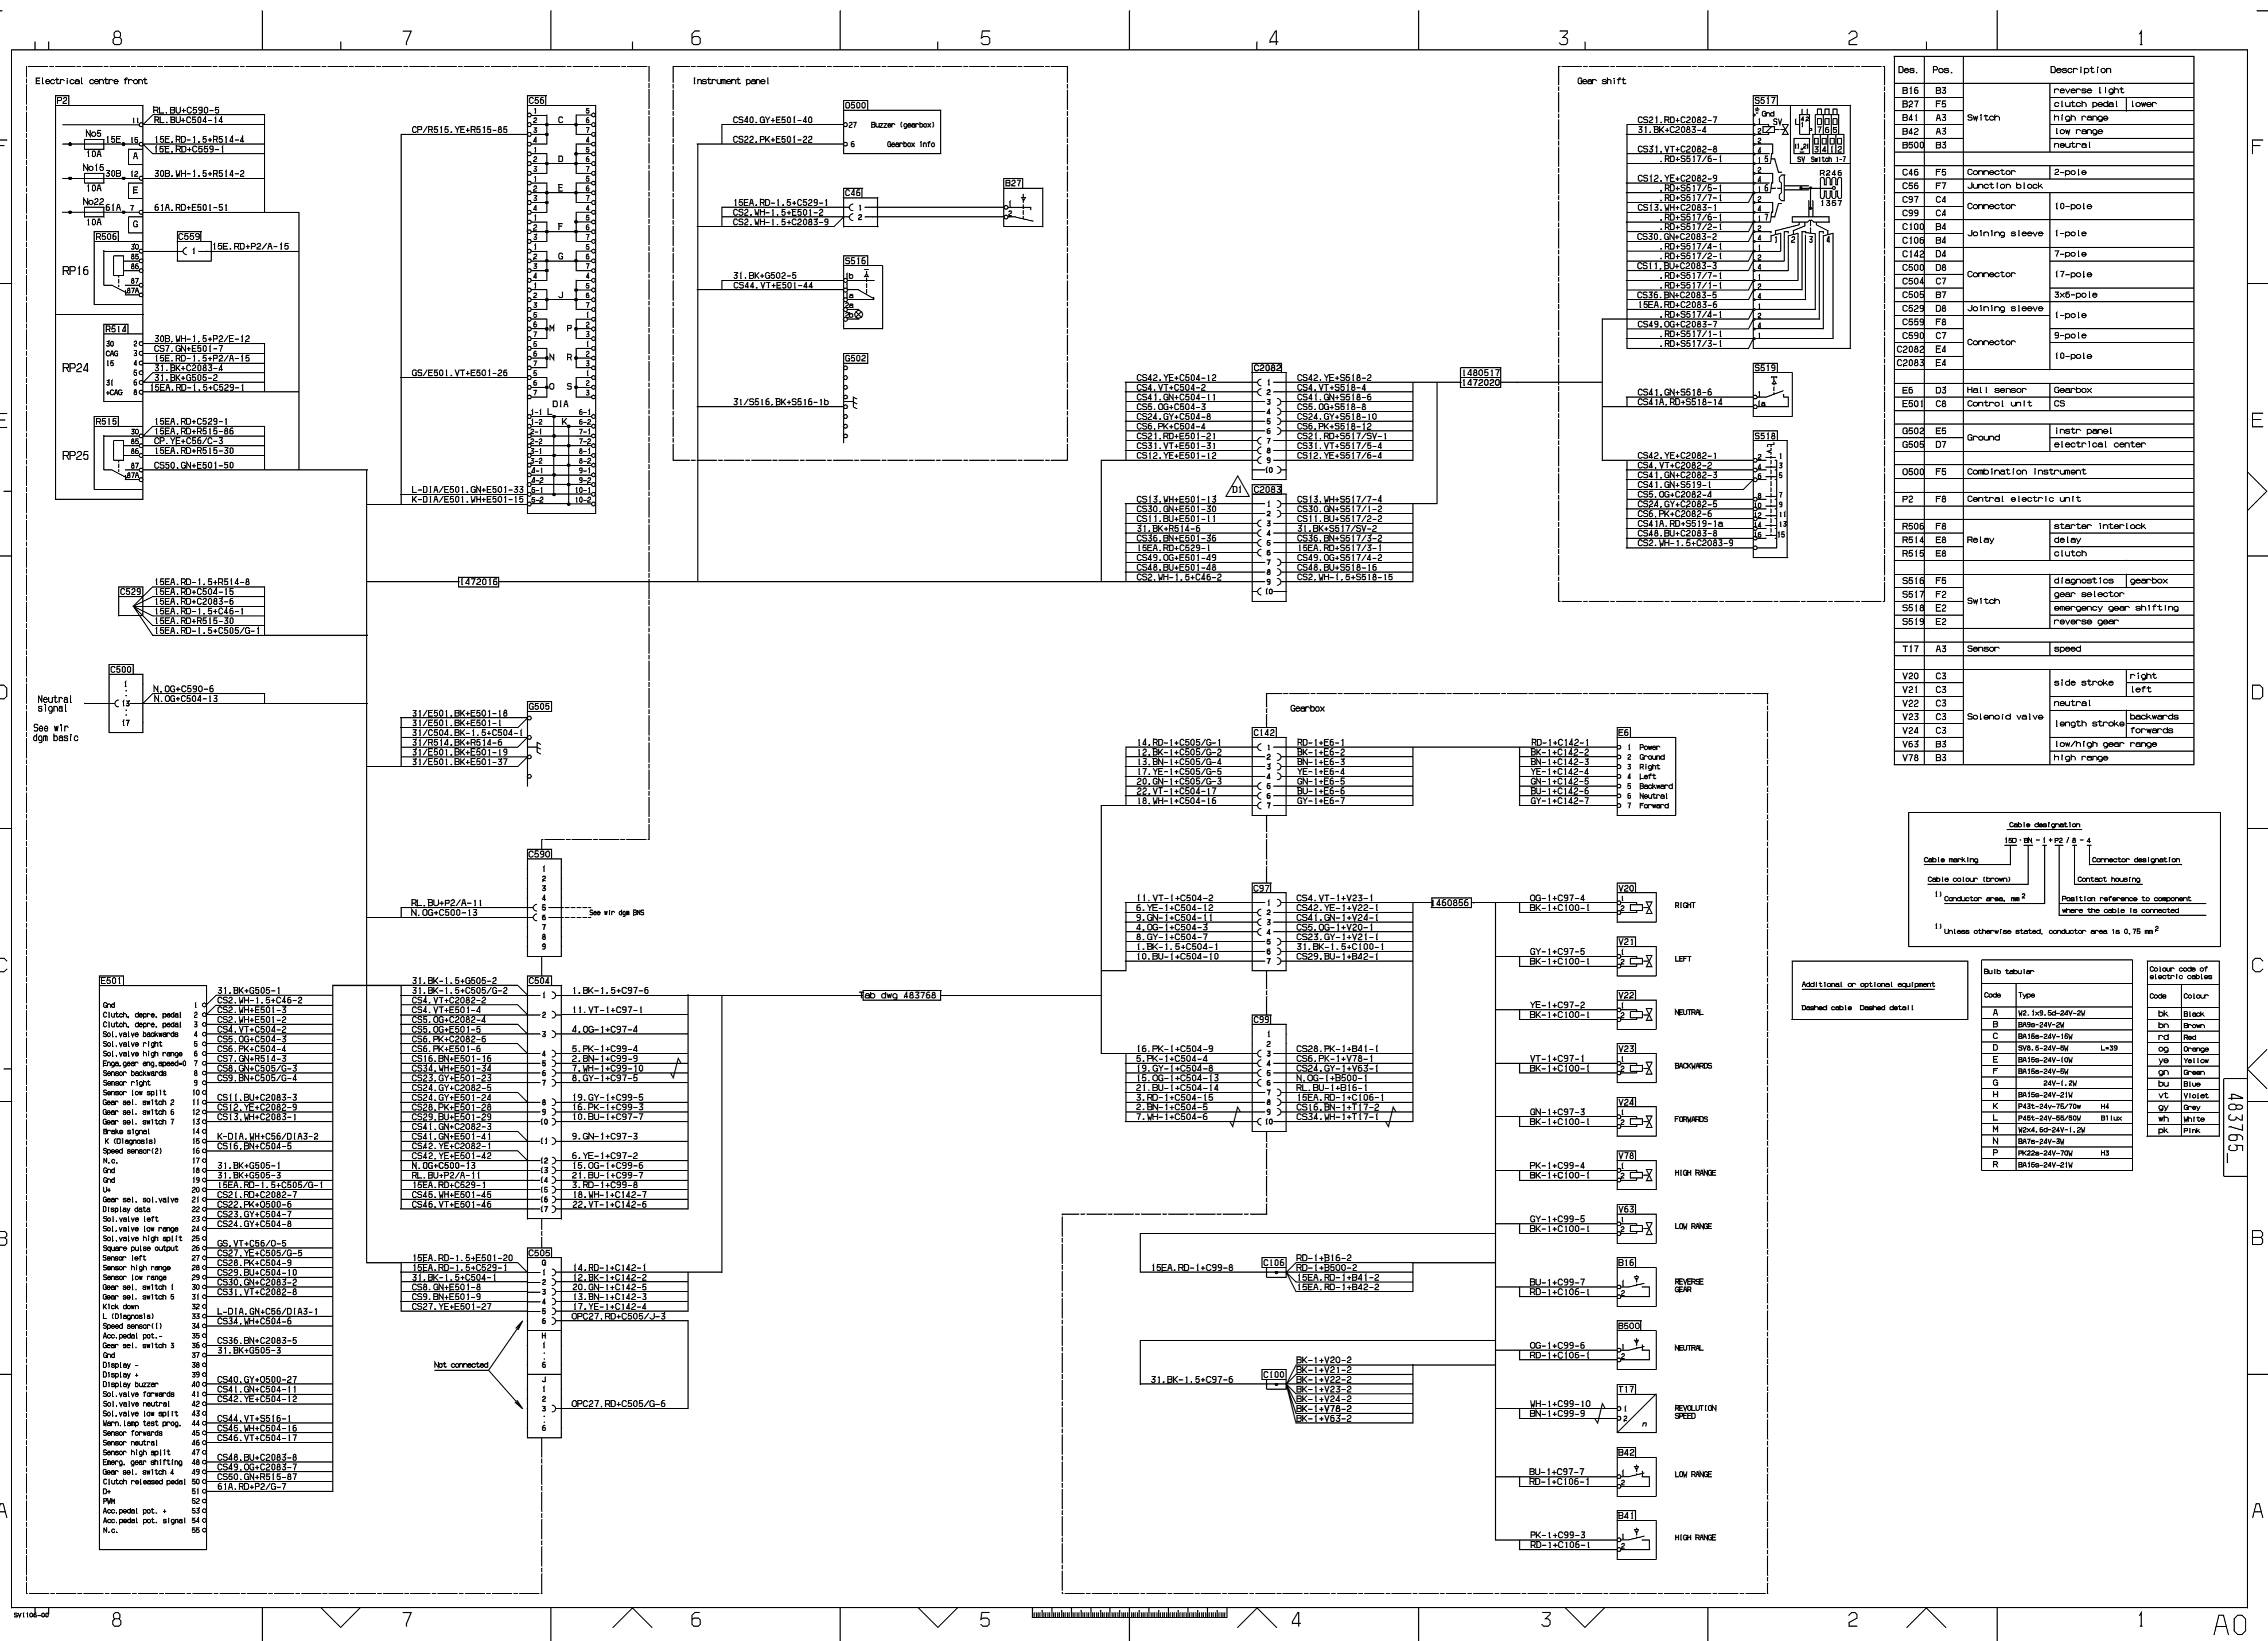

Des.	Pos.	Description
B16	B3	reverse light
B27	F5	clutch pedal lower
B41	A3	Switch high range
B42	A3	low range
B500	B3	neutral
C46	F6	Connector 2-pole
C56	F7	Junction block
C97	C4	Connector 10-pole
C99	C4	Joining sleeve 1-pole
C108	B4	Joining sleeve 1-pole
C108	B4	Joining sleeve 1-pole
C142	D4	Joining sleeve 7-pole
C508	D8	Connector 17-pole
C504	C7	Joining sleeve 3x6-pole
C505	B7	Joining sleeve 1-pole
C529	D8	Joining sleeve 1-pole
C559	F8	Joining sleeve 1-pole
C2082	C7	Connector 9-pole
C2083	E4	Connector 10-pole
E5	D3	Hall sensor Gearbox
E01	C8	Control unit CS
G502	E5	Instr. panel
G505	D7	Ground electrical center
G500	F5	Combination instrument
P2	F8	Central electric unit
R508	F8	Relay starter interlock
R514	E8	Relay delay
R515	E8	Relay clutch
S516	F5	diagnostics gear selector
S517	F2	gear selector
S518	E2	emergency gear shifting
S519	E2	reverse gear
T17	A3	Sensor speed
V20	C3	side stroke right
V21	C3	side stroke left
V22	C3	neutral
V23	C3	Solenoid valve length stroke backwards
V24	C3	forwards
V63	B3	low/high gear range
V78	B3	high range

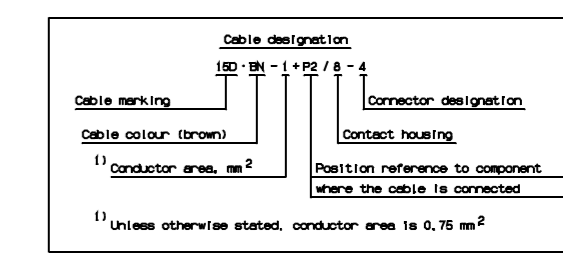

Additional or optional equipment:
Dashed cable Dashed detail

Bulb tubular		Colour code of electric cables	
Code	Type	Code	Colour
A	V2.1x3.5x24V-2W	BK	Black
B	BK9x-24V-2W	BR	Brown
C	BK15x-24V-15W	RD	Red
D	BK6x-24V-5W L=39	OG	Orange
E	BK15x-24V-10W	YB	Yellow
F	BK15x-24V-5W	GN	Green
G	24V-1.2W	BU	Blue
H	BK15x-24V-21W	VT	Violet
K	P43x-24V-75/70W H4	GY	Grey
L	P43x-24V-55/50W B1 lux	WH	White
M	V2x4.5x24V-1.2W	PK	Pink
N	BK7x-24V-3W		
P	PK22x-24V-21W	H3	
R	BK15x-24V-21W		

483765