





- 1. Cut a few millimetres outside the welds securing the protective plates.
- 2. Cut around the exhaust spigot.





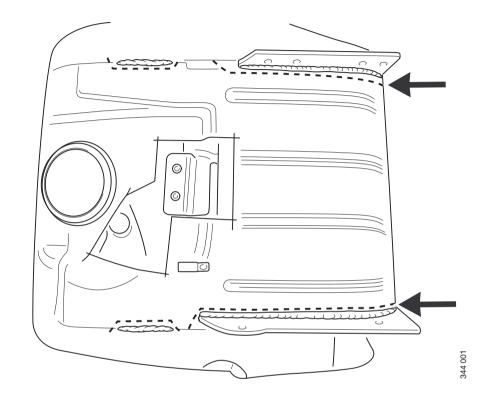


**3**. Cut around the exhaust spigot.

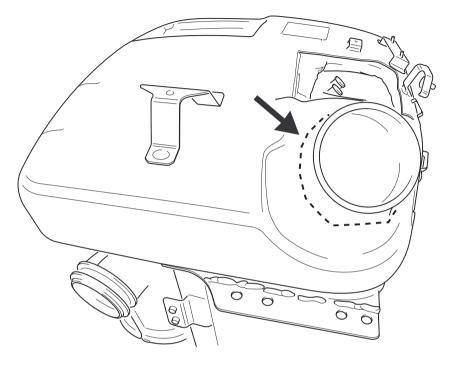





4. Cut a few millimetres outside the welds securing the protective end plate.

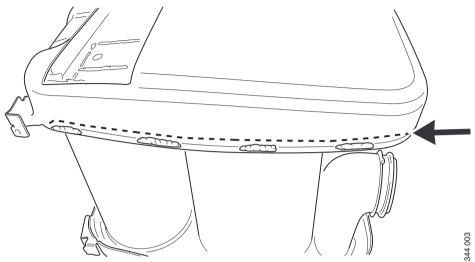






5. Lift off the protective end plate.


6. Turn over the silencer.

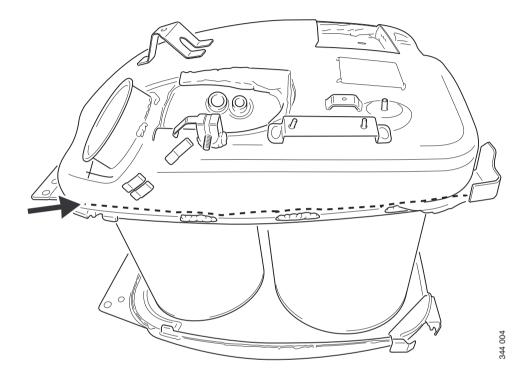






7. Cut a few millimetres outside the welds securing the protective end plate according to the following illustrations.

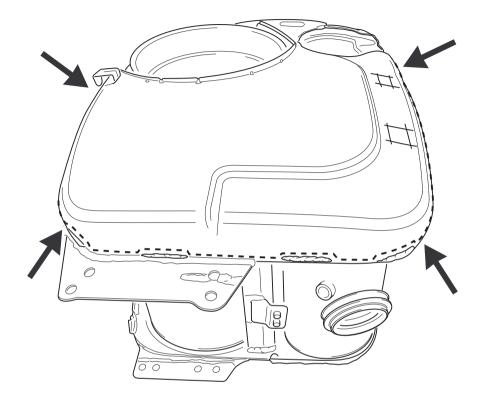






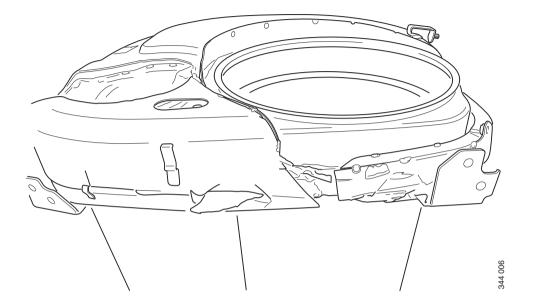






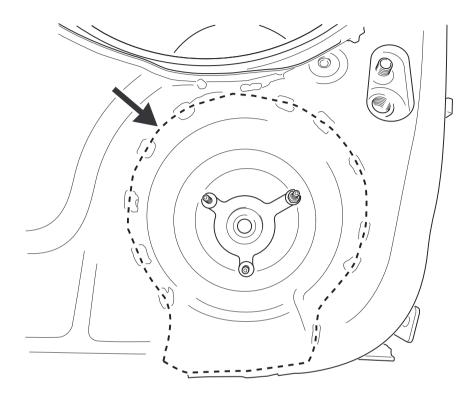





8. Lift away the protective end plate.

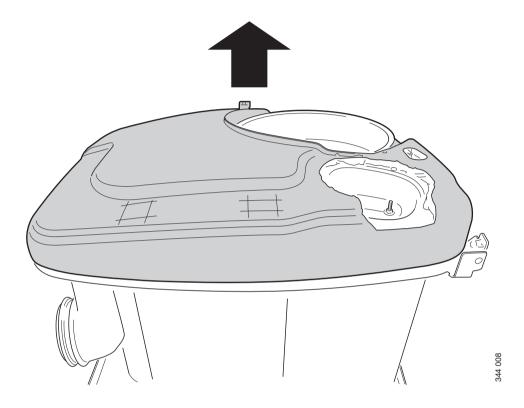






9. Cut according to the weld on the end plate as illustrated.

#### Note:


Use as small teeth as possible on the cutting tool so as not to damage the oxidation catalytic converter!

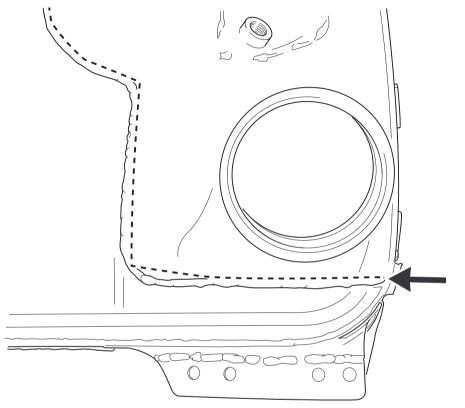





10. Lift out the end plate.

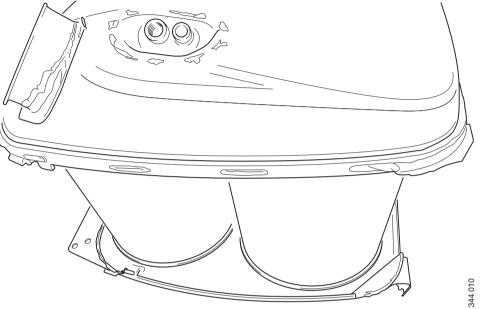






11. Cut according to the weld on the end plate as illustrated.

#### Note:

Use as small teeth as possible on the cutting tool so as not to damage the catalytic converter!

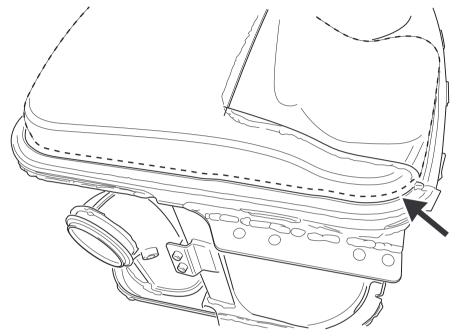






12. Lift out the end plate.

13. Turn over the silencer.

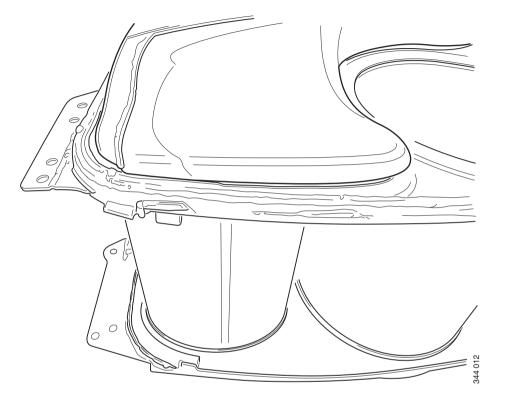






14. Cut according to the weld on the end plate as illustrated.

#### Note:


Use as small teeth as possible on the cutting tool so as not to damage the catalytic converter!

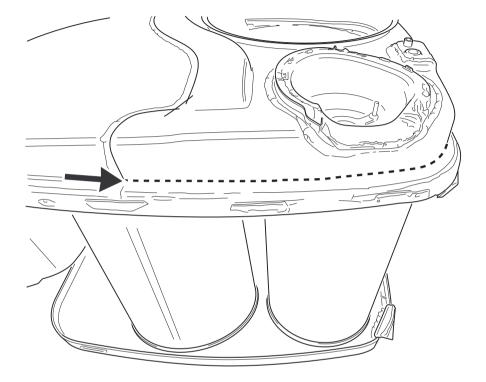





15. Lift out the end plate.

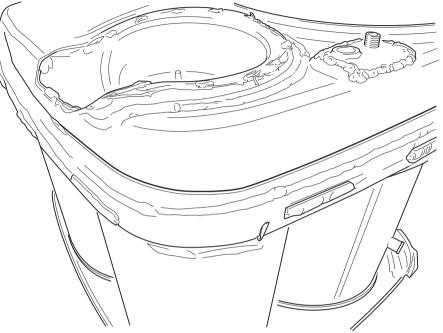






16. Cut according to the weld on the end plate as illustrated.

#### Note:


Use as small teeth as possible on the cutting tool so as not to damage the catalytic converter!

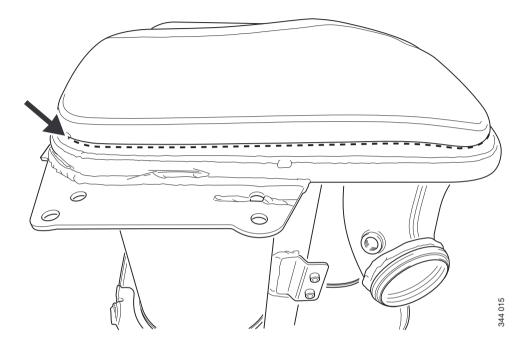






17. Lift out the end plate.

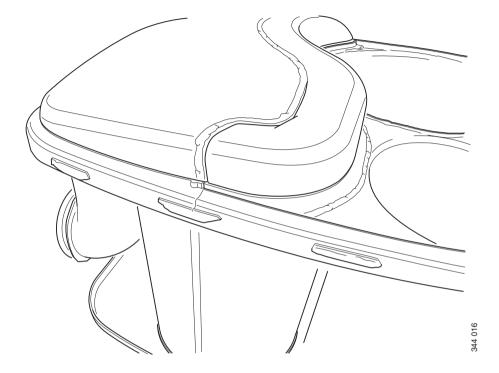






18. Cut around the catalytic converters.

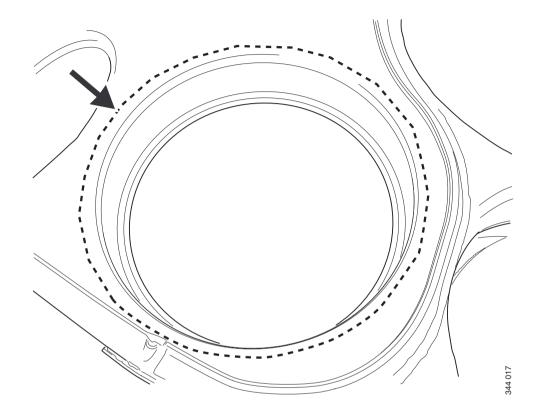



SCANIA


19. Cut around the inside of the oxidation catalytic converter tube.

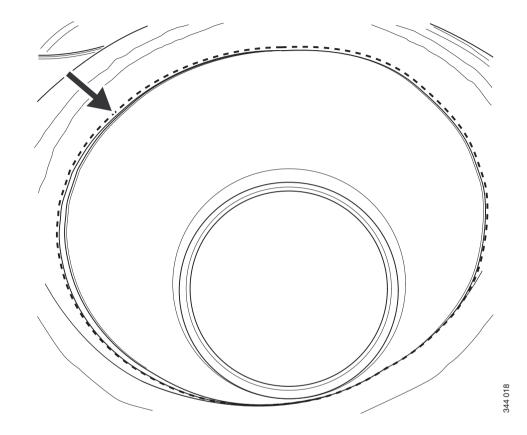






20. Cut around the inside of the other tube.

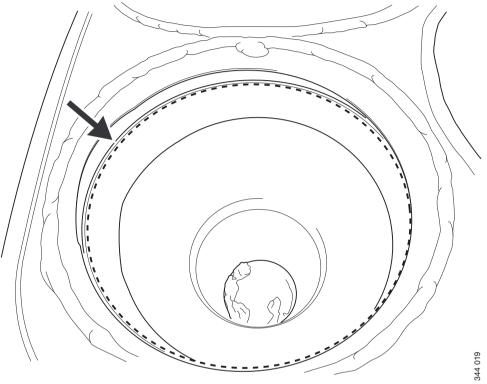






21. Cut the beam and lift off the plate.

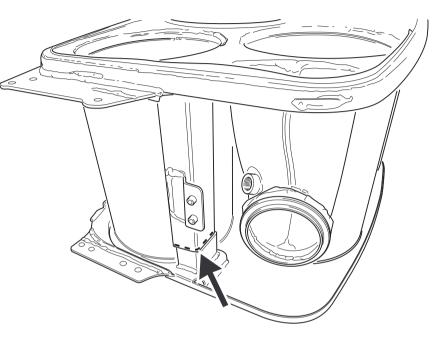






22. Turn the remains of the silencer over.

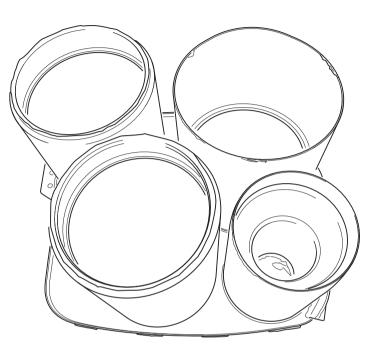






23. Cut around the catalytic converters and the oxidation catalytic converter.

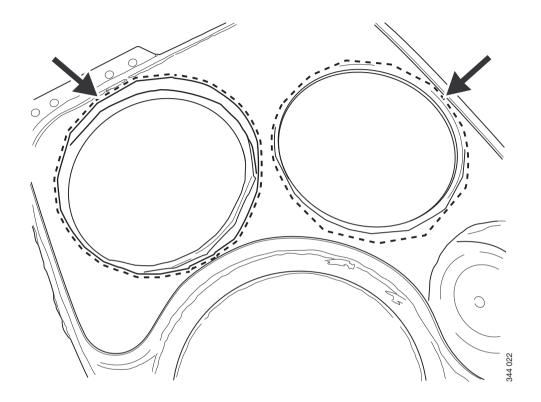





24. Lift out the plate.

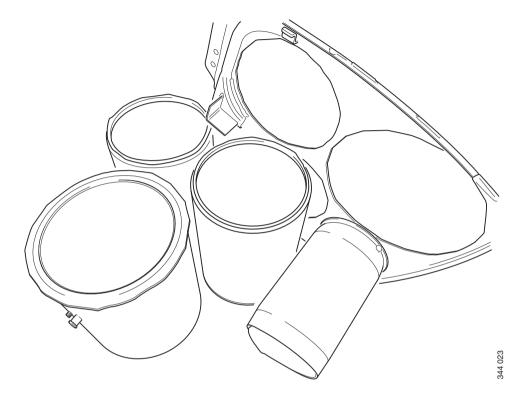





25. Cut the oxidation catalytic converter tube as illustrated.

